CITRAWEB SOLUSI TEKNOLOGI
www.citraweb.com
info@citraweb.com
sales@citraweb.com

Line Interactive UPS 2000VA/1200W



Kode : Plus5L-U2000G
Brand : Aplus
Jenis : UPS
Harga : Rp 1.440.000,00
~~Rp 1.880.000,00~~

Plus5L-U2000G adalah produk dari APlus UPS System dengan rating 2000VA/1200Watt dan memiliki desain "Easy Battery Replacement". Desain ini memungkinkan pengguna untuk mudah melakukan maintenance atau mengganti battery jika sudah lemah.


***Produk ini tidak termasuk battery**

Penawaran **Harga Spesial**
08112039555

www.citraweb.com

Features :

- Controlled by a technologically advanced microprocessor guaranteeing high reliability
- Equipped with 2-steps boost & 1-step buck AVR to stabilize output voltage
- USB port and monitor software is designed to manage UPS status via PC (Optional)
- Built-in DC start function enables UPS to be started without AC power supplied
- Constant current, constant voltage battery charger (CCCV Battery Charger)
- UPS will charge itself even though power switch is off (Off mode charging)
- UPS will shut down upon battery low ; UPS will restart automatically upon AC recovery (Auto-restart)
- Over / under voltage protection (UPS will go to battery mode)
- Easy replacement battery design
- Lightning / surge protection 175 joules

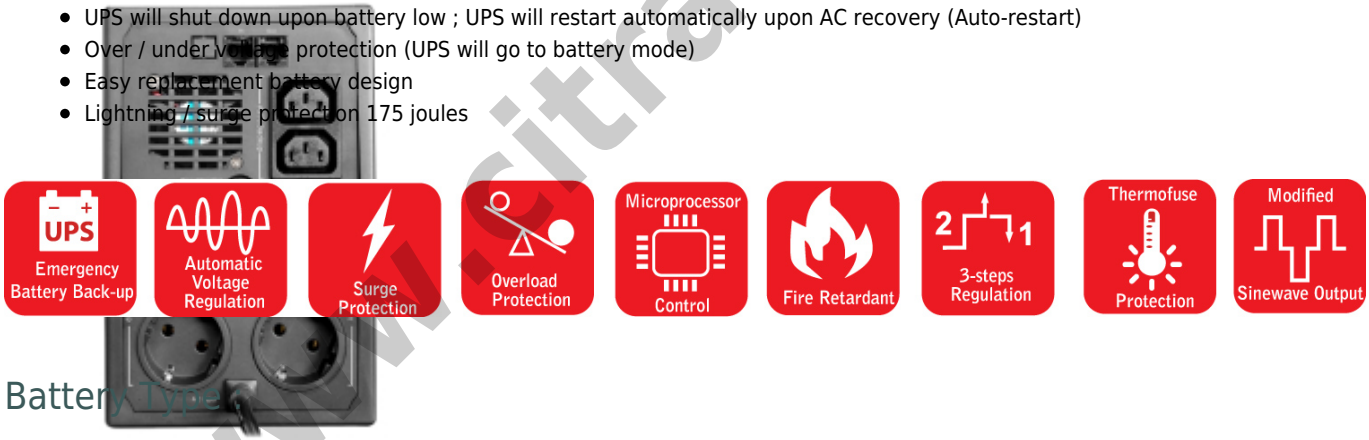


Battery Type

- VRLA 12V/9AH
- 2 pcs
- **Battery dimension 151 x 65 x 100 mm**

Easy Battery Replacement and Installation :

www.citraweb.com

Intelligent Battery Door Design:

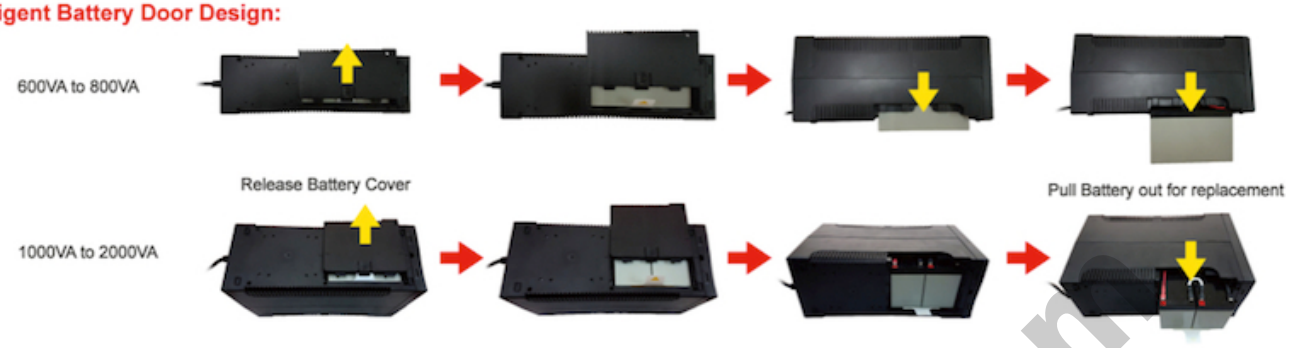

Manual :

[UPS-Aplus-Plus5L.pdf]

Specification :

Capacity	2000VA/1200W
INPUT	
Voltage	220V/230Vac
Voltage Range	-30% +25%
Frequency	50Hz or 60Hz (Auto-Sensing)
OUTPUT	
Voltage Regulation	+/- 10%
Frequency	AC mode: 47-53Hz for 50Hz or 57-63Hz for 60Hz; Battery mode: 50Hz or 60Hz +/- 1Hz
Waveform	Simulated Sinewave
Transfer Time	< 6ms(Typical)
Outlet:	Schuko 4pcs + IEC-320 C13 2pcs Backup/AVR/Surge protected
BATTERY	
Voltage	24VDC
Type	12V/9AH*2pcs
Recharge Time	5 hours to 90% after complete discharge
Safety Protection	Over Charge & Over Discharge Protection
Advance Battery Management	Yes

www.citraweb.com

DISPLAY	
LED Status Indicators	Input voltage, Output voltage, Load level, Battery level, Fault, Battery fail, Overload, AC normal
AUDIBLE ALARM	
Battery Mode	Two short tones every 8 seconds
Low Battery	Four short tones every seconds
Overload	Beeping continuosly
Fault	Beeping continuosly
MANAGEMENT	
USB Communication Port	Plus5L-U series: Yes, and download software is inlcuded. Monitoring software can support Microsoft Windows 2000/XP/Vista/7/8/10, Microsoft Windows Server 2003/2008/2012, Novell NetWare v3.1x/v4.x/v5.x, Linux, FreeBSD, MacOSX10.5.5
ENVIRONMENT	
Operating Temperature	0° C - 40° C (32° F ~ 104° F)
Humidity	0-95% (Non-condensing)
Acoustic Noise	<40 db at 1M
PHYSICAL	
Dimension (D*W*H)	343*135*208mm

www.citraweb.com

Download Datasheet

** Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat*

URL : https://www.citraweb.com/produk/1054/

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com