

# TSW100 TELTONIKA Industrial Unmanaged PoE+ Switch



**Kode** : TSW100  
**Brand** : Teltonika  
**Jenis** : Switch Unmanaged POE  
**Harga** : Rp 1.385.000,00

TSW100 is an unmanaged Gigabit Ethernet switch supporting Power-over-Ethernet. Classified as power source equipment (PSE), it centralizes the power supply, providing up to 30 watts per port and reducing installation effort. Five Gigabit Ethernet ports provide an economical high-bandwidth solution for a secure industrial Ethernet network.


**Produk ini belum termasuk power adaptor**

Penawaran Harga Spesial

 08112039555

## Features :

- 4 x PoE+ ports with 802.3af and 802.3at support
- Total power budget at PSE up to 120 W
- 5 x Gigabit Ethernet with speeds up to 1000 Mbps
- DIN rail and surface mounting options

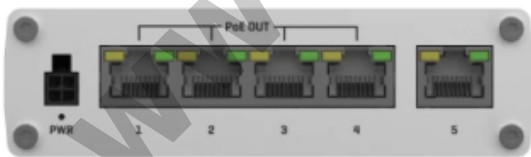

## Specification

|                 |        |
|-----------------|--------|
| <b>Model</b>    | TSW100 |
| <b>ETHERNET</b> |        |

|  |   |
|--|---|
| <b>LAN</b>                             | 5 x ETH ports, 10/100/1000 Mbps, supports auto MDI/MDIX crossover         |
| <b>IEEE 802.3 series standards</b>     | 802.3i, 802.3u, 802.3ab, 802.3x, 802.3az, 802.3ad                         |
| <b>POE</b>                             |   |
| <b>PoE ports</b>                       | Port 1- 4   |
| <b>PoE standards</b>                   | 802.3af and 802.3at   |
| <b>PoE Max Power per Port (at PSE)</b> | 30 W  |
| <b>PoE Power Budget (at PSE)</b>       | 120 W   |
| <b>PERFORMANCE SPECIFICATIONS</b>      |   |
| <b>Bandwidth (Non-blocking)</b>        | 10 Gbps   |
| <b>Packer buffer</b>                   | 128 KB  |
| <b>MAC address table size</b>          | 2K entries  |
| <b>POWER</b>                           |   |
| <b>Connector</b>                       | 4-pin industrial DC power socket  |
| <b>Input voltage range</b>             | 7 - 57 VDC  |
| <b>Input voltage range for PoE</b>     | 44 - 57 VDC   |
| <b>Power consumption</b>               | Idle: 2 W / Max (no PoE): 9 W / PoE Max: 129 W                            |
| <b>PHYSICAL INTERFACES</b>             |   |
| <b>Ethernet</b>                        | 5 x RJ45 ports, 10/100/1000 Mbps  |
| <b>Status LEDs</b>                     | 1 x Power LED, 10 x LAN status LEDs                                       |
| <b>Power</b>                           | 1 x 4-pin power connector   |
| <b>Other</b>                           | 1 x Grounding screw   |
| <b>PHYSICAL SPECIFICATION</b>          |   |
| <b>Casing material</b>                 | Full aluminum housing   |
| <b>Dimensions (W x H x D)</b>          | 115 x 32 x 95 mm  |
| <b>Mounting options</b>                | DIN rail or wall mounting (additional kit needed), flat surface placement |

| OPERATING ENVIRONMENT     |                           |
|---------------------------|---------------------------|
| Operating temperature     | -40 °C to 75 °C           |
| Operating humidity        | 10% to 90% non-condensing |
| Ingress Protection Rating | IP30                      |

Standard Package Contains :

- TSW100
- 62 W PSU
- QSG (Quick Start Guide)
- Packaging box

[Download Datasheet](#)

\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1062/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)