

# TSW200 TELTONIKA Industrial Unmanaged PoE+ Switch



**Kode** : TSW200

**Brand** : Teltonika

**Jenis** : Switch Unmanaged POE

**Harga** : Rp 1.673.000,00

TSW200 is an unmanaged industrial switch with 2 SFP ports for long-range Fiber-optic communication and 8 Gigabit Ethernet ports that support IEEE802.af and IEEE802.3at Power-over-Ethernet standards. Classified as power source equipment (PSE), it enables the centralization of the power supply, providing up to 30 watts per port and reducing the effort to install power.

**\*Belum termasuk power adaptor**

Penawaran Harga Spesial

 08112039555


Compatible Power Adaptor :

- [Power Adaptor DC 2-PIN 48 Volt 60 Watt 1.25 A](#)

- [Power Adaptor DC 2-PIN 48 Volt 120 Watt 2.5A](#)

Features :

- 2 x SFP ports for long-range Fiber-optic communication
- 8 x PoE+ ports with 802.af, 802.3at standard support
- Total power budget at PSE up to 240 W
- 8 x Gigabit Ethernet with speeds up to 1000 Mbps

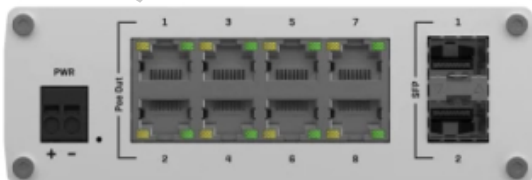

## Specification

<b>Model</b>	TSW200
<b>ETHERNET</b>	
<b>LAN</b>	8 x ETH ports, 10/100/1000 Mbps, supports auto MDI/MDIX crossover
<b>Fiber</b>	2 x SFP ports
<b>IEEE 802.3 series standards</b>	802.3i, 802.3u, 802.3ab, 802.3x, 802.3az, 802.3ad
<b>POE</b>	
<b>PoE ports</b>	Port 1-8
<b>PoE standards</b>	802.3af and 802.3at
<b>PoE Max Power per Port (at PSE)</b>	30 W
<b>PoE Power Budget (at PSE)</b>	240 W
<b>PERFORMANCE SPECIFICATIONS</b>	
<b>Bandwidth (Non-blocking)</b>	20 Gbps
<b>Packer buffer</b>	128 KB
<b>MAC address table size</b>	2K entries
<b>Jumbo frame support</b>	9216 bytes
<b>POWER</b>	
<b>Connector</b>	2-pin industrial DC power socket
<b>Input voltage range</b>	7 - 57 VDC
<b>Input voltage range for PoE</b>	44 - 57 VDC
<b>Power consumption</b>	Idle: 1.81 W / Max: 5.5 W / PoE Max: 245.5 W
<b>PHYSICAL INTERFACES</b>	
<b>Ethernet</b>	8 x RJ45 ports, 10/100/1000 Mbps
<b>Fiber</b>	2 x SFP ports
<b>Status LEDs</b>	1 x Power LED, 16 x LAN status LEDs 2 x SFP status LEDs
<b>Power</b>	1 x 2-pin industrial DC power socket
<b>Other</b>	1 x Grounding screw

PHYSICAL SPECIFICATION	
Casing material	Full aluminum housing
Dimensions (W x H x D)	132 x 44.2 x 95.1 mm
Mounting options	DIN rail or wall mounting (additional kit needed), flat surface placement
OPERATING ENVIRONMENT	
Operating temperature	-40 °C to 75 °C
Operating humidity	10% to 90% non-condensing
Ingress Protection Rating	IP30

Standard Package Contains :

- TSW200
- QSG (Quick Start Guide)
- Packaging box

[Download Datasheet](#)

\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1063/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)