CITRAWEB SOLUSI TEKNOLOGI
www.citraweb.com
info@citraweb.com
sales@citraweb.com

TSW202 TELTONIKA Managed PoE+ Switch



Kode : TSW202
Brand : Teltonika
Jenis : Switch Managed POE
Harga : Rp 3.157.000,00

TSW202 is a managed PoE+ Ethernet switch, designed to provide granular network management capabilities while centralising power distribution. This PoE+ switch enables flexibility over management and power supply and supports protocols, including EtherNet/IP, PROFINET, and MRP. The TSW202 has 2 SFP ports and 8 Gigabit Ethernet ports providing 30 W of power each.


***Belum termasuk power adaptor**

Penawaran **Harga Spesial**
08112039555

Compatible Power Adaptor :
- Power Adaptor DC 2-PIN 48 Volt 60 Watt 1.25 A
- Power Adaptor DC 2-PIN 48 Volt 120 Watt 2.5A

Features :

- L2 with additional L3 features for enhanced management and control
- 8 x port PoE+ switch with 2 x SFP ports for fibre optic communication
- Supports PROFINET for automated data processing alongside other protocols, like EtherNet/IP and MRP
- Teltonika Networks OS for switches, intuitively designed for infinite configurations

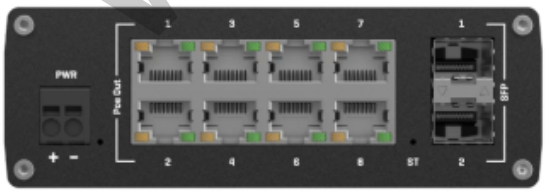



Specification

www.citraweb.com

CITRAWEB SOLUSI TEKNOLOGI
www.citraweb.com
info@citraweb.com
sales@citraweb.com

Model	TSW202
ETHERNET	
LAN	Multi-layer managed 8 x ETH ports, 10/100/1000 Mbps supports auto MDI/MDIX crossover
Fiber	2 x SFP ports
IEEE 802.3 series standards	802.3i, 802.3u, 802.3ab, 802.3x, 802.3z
POE	
PoE ports	Port 1-8
PoE standards	802.3af and 802.3at Alternative B
PoE Max Power per Port (at PSE)	30 W
PoE Power Budget (at PSE)	240 W
Maximum Ethernet cable length	100 m
PERFORMANCE SPECIFICATIONS	
Bandwidth (Non-blocking)	20 Gbps
Forwarding rate	14.88 Mpps
Packer buffer	512 KB
MAC address table size	8K entries
Jumbo frame support	10000 bytes
POWER	
Connector	2-pin industrial DC power socket
Input voltage range	7 – 57 VDC
Input voltage range for PoE	44 – 57 VDC
Power consumption	Idle: < 3 W / Max: 8 W / PoE Max: 248 W
PHYSICAL INTERFACES	
Ethernet	8 x RJ45 ports, 10/100/1000 Mbps
Fiber	2 x SFP ports

www.citraweb.com

Status LEDs	1 x Power LED, 1 x Aux LED, 16 x ETH status LEDs, 2 x SFP status LEDs
Power	1 x 2-pin industrial DC power socket
Reset	Software reset button
Other	1 x Grounding screw
PHYSICAL SPECIFICATION	
Casing material	Anodized aluminum housing and panels
Dimensions (W x H x D)	132 x 44.2 x 122.2 mm
Mounting options	Integrated DIN rail bracket, wall mount, flat surface (additional kit needed)
OPERATING ENVIRONMENT	
Operating temperature	-40 °C to 75 °C
Operating humidity	10% to 90% non-condensing
Ingress Protection Rating	IP30

Standard Package Contains :

- TSW202
- QSG (Quick Start Guide)
- Packaging box

Download Datasheet

** Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat*

URL : https://www.citraweb.com/produk/1225/

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com

www.citraweb.com