

TSW202 TELTONIKA Managed PoE+ Switch



Kode : TSW202

Brand : Teltonika

Jenis : Switch Managed POE

Harga : Rp 2.434.000,00

TSW202 is a managed PoE+ Ethernet switch, designed to provide granular network management capabilities while centralising power distribution. This PoE+ switch enables flexibility over management and power supply and supports protocols, including EtherNet/IP, PROFINET, and MRP. The TSW202 has 2 SFP ports and 8 Gigabit Ethernet ports providing 30 W of power each.

***Belum termasuk power adaptor**

Penawaran Harga Spesial

08112039555


Compatible Power Adaptor :

- [Power Adaptor DC 2-PIN 48 Volt 60 Watt 1.25 A](#)

- [Power Adaptor DC 2-PIN 48 Volt 120 Watt 2.5A](#)

Features :

- L2 with additional L3 features for enhanced management and control
- 8 x port PoE+ switch with 2 x SFP ports for fibre optic communication
- Supports PROFINET for automated data processing alongside other protocols, like EtherNet/IP and MRP
- Teltonika Networks OS for switches, intuitively designed for infinite configurations

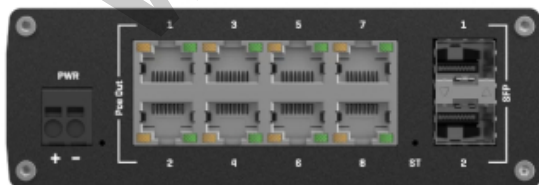

Specification

| | |
|--|--|
| Model | TSW202 |
| ETHERNET | |
| LAN | Multi-layer managed 8 x ETH ports, 10/100/1000 Mbps supports auto MDI/MDIX crossover |
| Fiber | 2 x SFP ports |
| IEEE 802.3 series standards | 802.3i, 802.3u, 802.3ab, 802.3x, 802.3z |
| POE | |
| PoE ports | Port 1-8 |
| PoE standards | 802.3af and 802.3at Alternative B |
| PoE Max Power per Port (at PSE) | 30 W |
| PoE Power Budget (at PSE) | 240 W |
| Maximum Ethernet cable length | 100 m |
| PERFORMANCE SPECIFICATIONS | |
| Bandwidth (Non-blocking) | 20 Gbps |
| Forwarding rate | 14.88 Mpps |
| Packer buffer | 512 KB |
| MAC address table size | 8K entries |
| Jumbo frame support | 10000 bytes |
| POWER | |
| Connector | 2-pin industrial DC power socket |
| Input voltage range | 7 - 57 VDC |
| Input voltage range for PoE | 44 - 57 VDC |
| Power consumption | Idle: < 3 W / Max: 8 W / PoE Max: 248 W |
| PHYSICAL INTERFACES | |
| Ethernet | 8 x RJ45 ports, 10/100/1000 Mbps |
| Fiber | 2 x SFP ports |

| | |
|----------------------------------|---|
| Status LEDs | 1 x Power LED, 1 x Aux LED, 16 x ETH status LEDs, 2 x SFP status LEDs |
| Power | 1 x 2-pin industrial DC power socket |
| Reset | Software reset button |
| Other | 1 x Grounding screw |
| PHYSICAL SPECIFICATION | |
| Casing material | Anodized aluminum housing and panels |
| Dimensions (W x H x D) | 132 x 44.2 x 122.2 mm |
| Mounting options | Integrated DIN rail bracket, wall mount, flat surface (additional kit needed) |
| OPERATING ENVIRONMENT | |
| Operating temperature | -40 °C to 75 °C |
| Operating humidity | 10% to 90% non-condensing |
| Ingress Protection Rating | IP30 |

Standard Package Contains :

- TSW202
- QSG (Quick Start Guide)
- Packaging box

[Download Datasheet](#)

* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1225/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com