

# Pro 24 PoE UNIFI UBIQUITI 24-Port POE++ Switch with SFP+ Uplink

**Kode** : USW-PRO-24-POE

**Brand** : Ubiquiti

**Jenis** : Switch Managed POE

**Harga** : Rp 14.370.000,00




USW-PRO-24-POE UniFi 24-port GbE Layer 3 switch with 16-port GbE PoE+, 8-port GbE PoE++ and 2-port SFP+ 10G.

**Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.**

Penawaran Harga Spesial

 **08112039555**

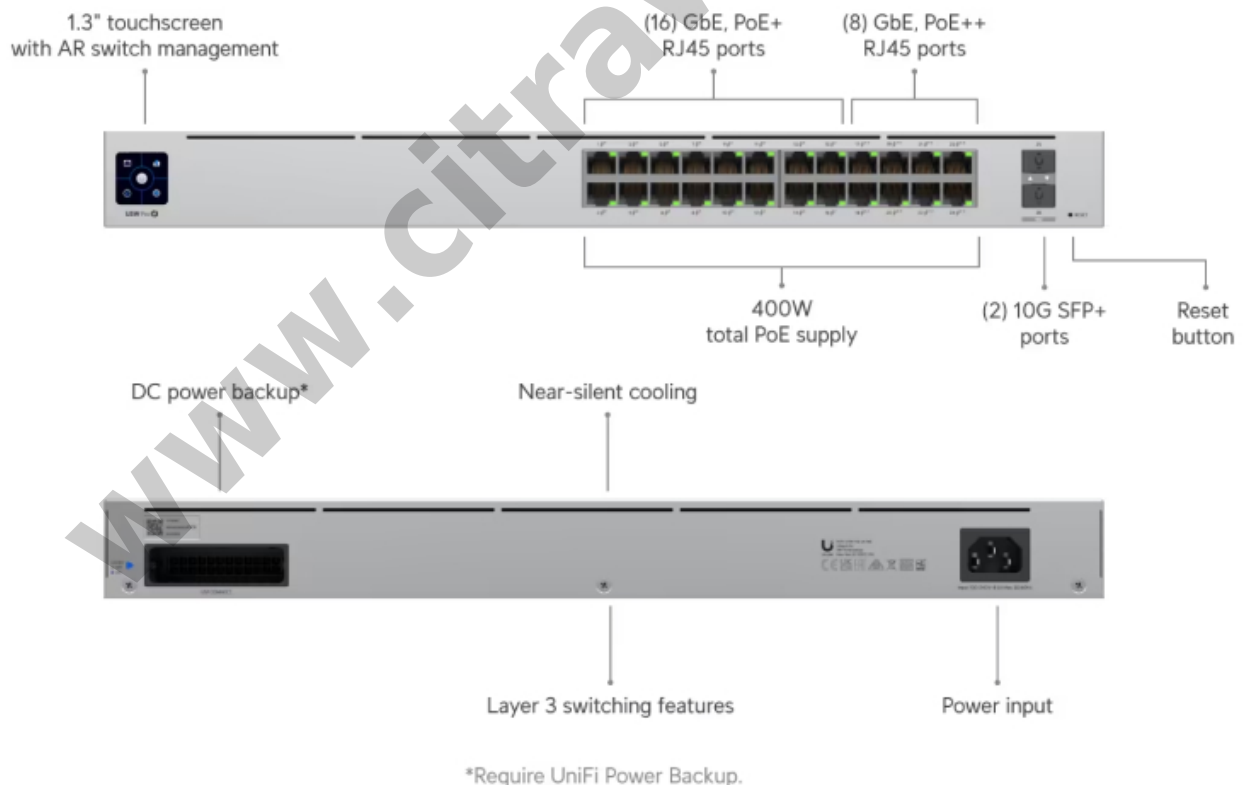

## Specification

|              |                |
|--------------|----------------|
| <b>Model</b> | USW-PRO-24-POE |
|--------------|----------------|

|  |  |
|--|--|
| <b>Ports</b>                                   | 1 GbE RJ45 : 24 (16 PoE+; 8 PoE++)<br>10G SFP+ : 2                 |
| <b>Total PoE Availability</b>                  | 400W   |
| <b>Max. PoE Wattage per Port by PSE</b>        | PoE : 15.4W<br>PoE+ : 32W<br>PoE++ : 64W                           |
| <b>Layer Type</b>                              | Layer 3  |
| <b>Switching capacity</b>                      | 88 Gbps  |
| <b>Total Non-Blocking Throughput</b>           | 44 Gbps  |
| <b>Forwarding rate</b>                         | 65 Mpps  |
| <b>Supported VLANs</b>                         | 1000   |
| <b>MAC address table</b>                       | 16000  |
| <b>L3 Table Size</b>                           | ARP Entries : 768<br>IPv4 Routes : 64                              |
| <b>Packet Buffer Size</b>                      | 2 MB   |
| <b>Dimensions (W x D x H)</b>                  | 442 x 285 x 44 mm  |
| <b>Max. Power Consumption</b>                  | 50W (Excluding PoE Output)<br>450W (Including PoE Output)          |
| <b>Power Method</b>                            | (1) Universal input, 100–240V AC, 50/60 Hz<br>(1) USP RPS DC input |
| <b>Power Input Method</b>                      | AC input   |
| <b>Power Supply</b>                            | AC/DC, internal, 450W  |
| <b>Supported Voltage Range</b>                 | 100–240V AC  |
| <b>Management</b>                              | Ethernet<br>AR   |
| <b>Heat Dissipation (Excluding PoE Output)</b> | 170.6 BTU/hr   |
| <b>Enclosure Material</b>                      | SGCC steel   |
| <b>Supported Rack Depth</b>                    | 400~1200 mm (15.7-47.2")   |
| <b>LCM Display</b>                             | 1.3" touchscreen   |
| <b>ESD/EMP Protection</b>                      | Air: ± 16kV, contact: ± 12kV                                       |
| <b>Ambient Operating Temperature</b>           | -5 to 40 C (23 to 104 F)   |
| <b>Ambient Operating Humidity</b>              | 10 to 90% noncondensing  |
| <b>Certifications</b>                          | CE, FCC, IC  |

[Download Datasheet](#)

*\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat*

**URL :** <https://www.citraweb.com/produk/1340/>

**Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)**

[www.citraweb.com](http://www.citraweb.com)