CITRAWEB SOLUSI TEKNOLOGI
www.citraweb.com
info@citraweb.com
sales@citraweb.com

TSW030 TELTONIKA 8 Port Ethernet Switch Unmanaged




Kode : TSW030
Brand : Teltonika
Jenis : Switch Unmanaged
Harga : Rp 1.053.000,00

Teltonika TSW030 adalah *industrial ethernet switch unmanaged* yang hemat biaya, dilengkapi dengan 8 port RJ45 10/100 dan DIN Rail yang terintegrasi. Memiliki input daya 2-pin serta konsumsi daya yang rendah hanya sampai 0,5 W saat idle dan maksimal hingga 1,5 W. Hal ini menjadikan *switch plug-and-play* ini sangat cocok untuk aplikasi industri yang membutuhkan koneksi hingga delapan perangkat.

Penawaran Harga Spesial
08112039555

Features :

- Sederhana dan cocok untuk aplikasi industri
- **Hemat energi:** Hanya sampai 0,5 W saat *idle*, dan maksimal hingga 1,5 W
- **Pemasangan mudah** untuk penerapan langsung (*plug-and-play*)
- **Delapan port Ethernet** dengan kecepatan 10/100 Mbps

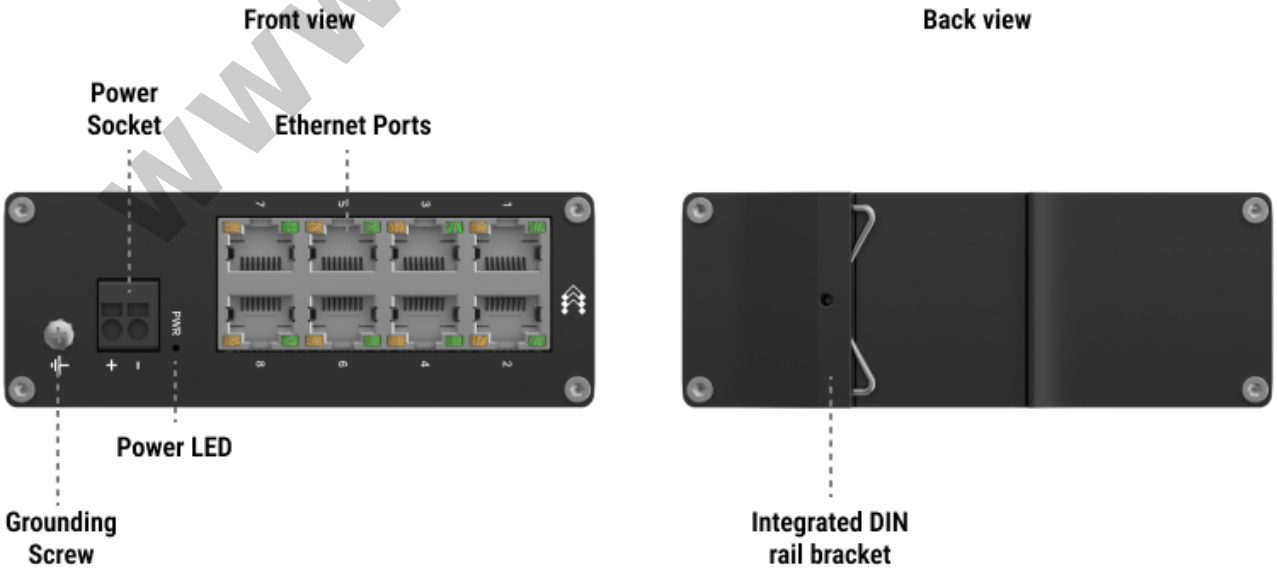

www.citraweb.com

CITRAWEB SOLUSI TEKNOLOGI
www.citraweb.com
info@citraweb.com
sales@citraweb.com

Specification

Model	TSW030
ETHERNET	
LAN	8 x ETH ports, 10/100 Mbps, supports auto MDI/MDIX crossover
IEEE 802.3 series standards	802.3i, 802.3u, 802.3ab, 802.3x, 802.3az
INDUSTRIAL PROTOCOLS	
Profinet	Profinet Class A conformance (available with optional order code)
PERFORMANCE SPECIFICATIONS	
Bandwidth (Non-blocking)	20 Gbps
Packer buffer	128 KB
MAC address table size	2K entries
Jumbo frame support	9216 bytes
POWER	
Connector	2-pin industrial DC power socket
Input voltage range	7 – 57 VDC, overvoltage protection: 60Vmax, reverse polarity protection: 80Vmax, surge protection: min 64.4V/max 71.2V breakdown voltage, 93.6V maximum reverse voltage @4.3A maximum reverse surge current, 1- Vin, 2- PGND
Power consumption	Idle: 0.5 W / Max: 1.5 W
PHYSICAL INTERFACES	
Ethernet	8 x RJ45 ports, 10/100 Mbps
Status LEDs	1 x Power LED, 16 x ETH status LEDs
Power	1 x 2-pin industrial DC power socket
Other	1 x Grounding screw
PHYSICAL SPECIFICATION	
Casing material	Anodized aluminium housing and panels

www.citraweb.com

Dimensions (W x H x D)	113.1 x 41.2 x 74.6 mm
Mounting options	Integrated DIN rail bracket; wall mount and flat surface (additional kit needed)
OPERATING ENVIRONMENT	
Operating temperature	-40 °C to 75 °C
Operating humidity	5% to 95% non-condensing
Ingress Protection Rating	IP30

Standard Package Contains :

- TSW030
- QSG (Quick Start Guide)
- Packaging box

Download Datasheet

* *Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat*

URL : https://www.citraweb.com/produk/1525/

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com

www.citraweb.com