

# TSW030 TELTONIKA 8 Port Ethernet Switch Unmanaged



**Kode** : TSW030

**Brand** : Teltonika

**Jenis** : Switch Unmanaged

**Harga** : Rp 794.000,00



**Teltonika TSW030** adalah *industrial ethernet switch unmanaged* yang hemat biaya, dilengkapi dengan 8 port RJ45 10/100 dan DIN Rail yang terintegrasi. Memiliki input daya 2-pin serta konsumsi daya yang rendah hanya sampai 0,5 W saat *idle* dan maksimal hingga 1,5 W. Hal ini menjadikan *switch plug-and-play* ini sangat cocok untuk aplikasi industri yang membutuhkan koneksi hingga delapan perangkat.

Penawaran Harga Spesial

 08112039555

Features :

- Sederhana dan cocok untuk aplikasi industri
- **Hemat energi:** Hanya sampai 0,5 W saat *idle*, dan maksimal hingga 1,5 W
- **Pemasangan mudah** untuk penerapan langsung (*plug-and-play*)
- **Delapan port Ethernet** dengan kecepatan 10/100 Mbps

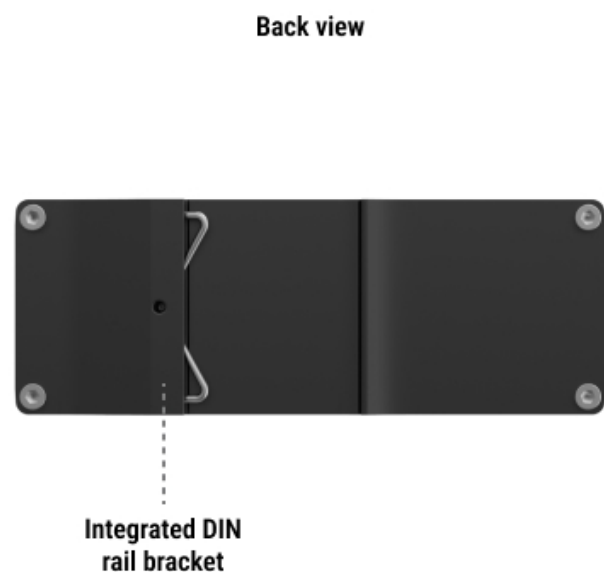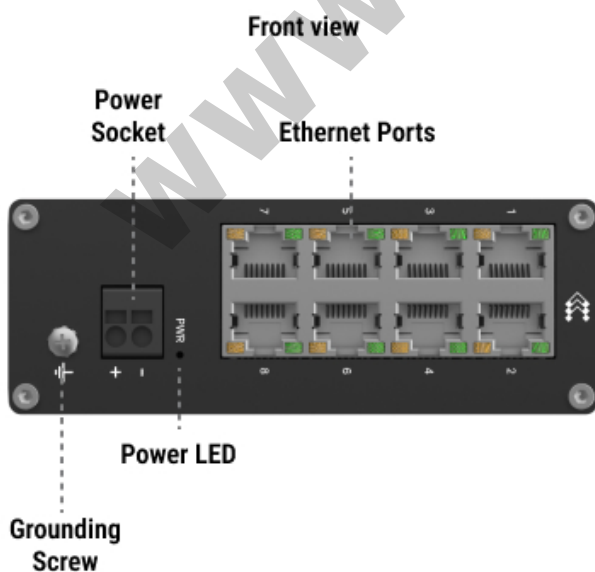

**Specification**

<b>Model</b>	TSW030
<b>ETHERNET</b>	
<b>LAN</b>	8 x ETH ports, 10/100 Mbps, supports auto MDI/MDIX crossover
<b>IEEE 802.3 series standards</b>	802.3i, 802.3u, 802.3ab, 802.3x, 802.3az
<b>INDUSTRIAL PROTOCOLS</b>	
<b>Profinet</b>	Profinet Class A conformance (available with optional order code)
<b>PERFORMANCE SPECIFICATIONS</b>	
<b>Bandwidth (Non-blocking)</b>	20 Gbps
<b>Packer buffer</b>	128 KB
<b>MAC address table size</b>	2K entries
<b>Jumbo frame support</b>	9216 bytes
<b>POWER</b>	
<b>Connector</b>	2-pin industrial DC power socket
<b>Input voltage range</b>	7 - 57 VDC, overvoltage protection: 60Vmax, reverse polarity protection: 80Vmax, surge protection: min 64.4V/max 71.2V breakdown voltage, 93.6V maximum reverse voltage @4.3A maximum reverse surge current, 1- Vin, 2- PGND
<b>Power consumption</b>	Idle: 0.5 W / Max: 1.5 W
<b>PHYSICAL INTERFACES</b>	
<b>Ethernet</b>	8 x RJ45 ports, 10/100 Mbps
<b>Status LEDs</b>	1 x Power LED, 16 x ETH status LEDs
<b>Power</b>	1 x 2-pin industrial DC power socket
<b>Other</b>	1 x Grounding screw
<b>PHYSICAL SPECIFICATION</b>	
<b>Casing material</b>	Anodized aluminium housing and panels

<b>Dimensions (W x H x D)</b>	113.1 x 41.2 x 74.6 mm
<b>Mounting options</b>	Integrated DIN rail bracket; wall mount and flat surface (additional kit needed)
<b>OPERATING ENVIRONMENT</b>	
<b>Operating temperature</b>	-40 °C to 75 °C
<b>Operating humidity</b>	5% to 95% non-condensing
<b>Ingress Protection Rating</b>	IP30

Standard Package Contains :

- TSW030
- QSG (Quick Start Guide)
- Packaging box

[Download Datasheet](#)

\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

**URL :** <https://www.citraweb.com/produk/1525/>

**Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)**