

# eKitEngine AP160 HUAWEI Wi-Fi 6 1.775Gbps Dual Band Wall Plate Access Point

**Kode** : AP160**Brand** : Huawei**Jenis** : Wireless Indoor**Harga** : Rp 1.278.000,00

**HUAWEI eKitEngine AP160** adalah Access Point indoor wall plate 86x86 mm dengan panel ultra-tipis 8 mm berteknologi Wi-Fi 6 (802.11ax) yang beroperasi simultan di frekuensi 2.4 GHz (2x2) dan 5 GHz (2x2) dengan kecepatan data hingga 1,775 Gbps. Ukuran ringkas dan sangat ideal dipasang untuk area perkantoran, properti komersial, dan hotel.

**\*Belum termasuk adaptor dan poe injector**

**\*Spesifikasi perangkat dijual bisa berbeda dengan yang ditampilkan karena menyesuaikan dengan regulasi di Indonesia.**

**Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.**

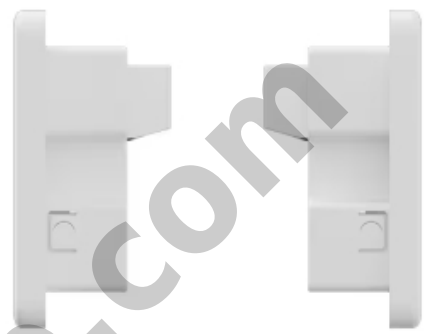
Penawaran Harga Spesial

 **08112039555**

- Wall plate 86x86 AP
- 802.11ax
- 1.775 Gbps device rate
- Dual-radio
- 48 access users recommended
- Max. 128 access users
- 20 dBm transmit power
- Smart antenna
- 15 m optimal coverage range

**TOP VIEW**

**BACK VIEW**

**SIDE VIEW**

**Spesifikasi**

|                                                              |                                                                                                                                                                                                |
|--------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Model</b>                                                 | AP160                                                                                                                                                                                          |
| <b>Wi-Fi standard</b>                                        | 2.4G: 802.11b/g/n/ax<br>5G: 802.11a/n/ac/ac Wave 2/ax                                                                                                                                          |
| <b>Optimal Signal Distance (m)</b>                           | 15                                                                                                                                                                                             |
| <b>Max Number of Access Users</b>                            | 128                                                                                                                                                                                            |
| <b>Recommended Number of Access Users</b>                    | 48                                                                                                                                                                                             |
| <b>Device Rate</b>                                           | 1.775 Gbps                                                                                                                                                                                     |
| <b>Maximum number of physical ports on the entire device</b> | 2x GE (RJ45), 10M/100M/1000M auto-sensing                                                                                                                                                      |
| <b>Radio number</b>                                          | 2                                                                                                                                                                                              |
| <b>Maximum channel bandwidth [MHz]</b>                       | Radio 0 (2.4 GHz): 40 MHz<br>Radio 1 (5 GHz): 80 MHz                                                                                                                                           |
| <b>Maximum transmit power</b>                                | 2.4G: 17 dBm/chain 20 dBm (combined power)<br>5G: 17 dBm/chain 20 dBm (combined power)                                                                                                         |
| <b>MIMO spatial streams</b>                                  | Radio 0 (2.4 GHz): 2x2<br>Radio 1 (5 GHz): 2x2                                                                                                                                                 |
| <b>Maximum power consumption [W]</b>                         | 9.1                                                                                                                                                                                            |
| <b>Input voltage range [V]</b>                               | PoE: 802.3af                                                                                                                                                                                   |
| <b>Dimensions without packaging (H x W x D) [mm(in.)]</b>    | 86 mm x 86 mm x 42.5 mm (3.39 in. x 3.39 in. x 1.67 in.)                                                                                                                                       |
| <b>Long-term operating temperature [°C(°F)]</b>              | 0°C to 40°C (32°F to 104°F) (From 1800 m to 5000 m [5905.51 ft. to 16404.20 ft.], the maximum ambient temperature decreases by 1°C [1.8°F] for every 300 m [984.25 ft.] increase in altitude.) |

|                                                   |                                                                                                                  |
|---------------------------------------------------|------------------------------------------------------------------------------------------------------------------|
| <b>Long-term operating relative humidity [RH]</b> | 5% RH to 95% RH, non-condensing                                                                                  |
| <b>Radio interface</b>                            | Built-in smart antennas                                                                                          |
| <b>Antenna gain</b>                               | 2.4 GHz: 3 dBi/chain (peak value) 3 dBi (combined gain)<br>5 GHz: 2 dBi/chain (peak value) 1 dBi (combined gain) |
| <b>Operating frequency band</b>                   | 2.4GHz,5GHz                                                                                                      |
| <b>Power supply mode</b>                          | PoE                                                                                                              |
| <b>Service port surge protection</b>              | PoE port: Common mode (8 wires to ground): 4 kV (1.2/50 us, 42 ohms), criterion C                                |
| <b>Storage temperature [°C(°F)]</b>               | -40°C to +70°C (-40°F to +158°F)                                                                                 |
| <b>Long-term operating altitude [m(ft.)]</b>      | -60 m to +5000 m (-196.85 ft to +16404.20 ft)                                                                    |
| <b>Atmospheric pressure [kPa]</b>                 | 53kPa - 106kPa ETSI 300 019-2-3                                                                                  |
| <b>Ground</b>                                     | Floating ground                                                                                                  |
| <b>Frequency stability [ppm]</b>                  | +/-20                                                                                                            |

[Download Datasheet](#)

\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

**URL :** <https://www.citraweb.com/produk/1545/>

**Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)**