

# TP-LINK ER605 OMADA Gigabit VPN Gateway

**Kode** : ER605**Brand** : TP-Link Omada**Jenis** : Router Desktop**Harga** : Rp 1.053.000,00


**TP-LINK ER605 OMADA** merupakan perangkat gateway dilengkapi dengan 5 port gigabit (1 port fixed WAN, 2 port fixed LAN dan 2 port WAN/LAN). Perangkat ini juga memiliki 1 port USB 2.0 yang mendukung Dongle USB LTE, Support load balancing hingga 3 WAN.

**Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.**

Penawaran Harga Spesial

 **08112039555**

- **Terintegrasi ke dalam Omada SDN** : Penyediaan Tanpa Sentuhan (Zero-Touch Provisioning), Manajemen Cloud Terpusat, dan Pemantauan Cerdas.
- **Manajemen Cloud Terpusat** : Akses cloud dan aplikasi Omada untuk kenyamanan dan pengelolaan yang mudah.
- **Lima Port Gigabit** : Konektivitas kabel berkecepatan tinggi.
- **Hingga 3 Port Ethernet WAN** : 1 port WAN Gigabit dan 2 port WAN/LAN Gigabit dengan penyeimbangan beban meningkatkan tingkat pemanfaatan broadband multi-jalur.
- **Satu Port WAN USB untuk Broadband Seluler** : Broadband seluler melalui modem 4G/3G didukung untuk cadangan WAN dengan menghubungkan ke port USB.
- **VPN yang Sangat Aman** : Mendukung hingga 20 koneksi LAN-ke-LAN IPsec, 50 koneksi OpenVPN, 16 koneksi L2TP, dan 16 koneksi PPTP VPN.
- **Fitur Keamanan yang Melimpah** : Kebijakan firewall tingkat lanjut, pertahanan DoS, pemfilteran IP/MAC/URL, dan lebih banyak fungsi keamanan melindungi jaringan dan data Anda.

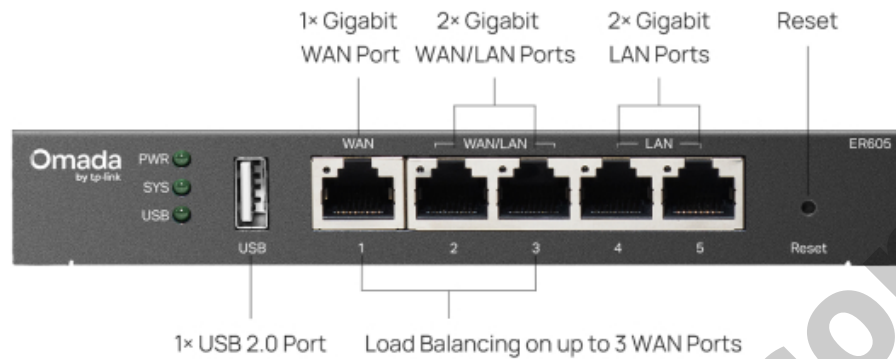



## Spesifikasi

|                                 |                                                                                                                                                                                        |
|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Model</b>                    | ER605                                                                                                                                                                                  |
| <b>HARDWARE FEATURES</b>        |                                                                                                                                                                                        |
| <b>Interface</b>                | <ul style="list-style-type: none"> <li>• 1 Gigabit WAN port</li> <li>• 2 Gigabit WAN/LAN ports</li> <li>• 2 Gigabit LAN ports</li> <li>• 1 USB2.0 (supports USB LTE dongle)</li> </ul> |
| <b>Button</b>                   | Reset Button                                                                                                                                                                           |
| <b>Power Supply</b>             | External 12V/1A DC Adapter                                                                                                                                                             |
| <b>Flash</b>                    | 128 MB NAND                                                                                                                                                                            |
| <b>DRAM</b>                     | 256 MB                                                                                                                                                                                 |
| <b>LED</b>                      | PWR, SYS, WAN (Link/Act), LAN (Link/Act), USB                                                                                                                                          |
| <b>Dimensions ( W x D x H )</b> | 6.2 x 4.0 x 1.0 in (158 x 101 x 25mm)                                                                                                                                                  |
| <b>Mounting</b>                 | Desktop/Wall-mount                                                                                                                                                                     |
| <b>Max. Power Consumption</b>   | 7.94 W                                                                                                                                                                                 |

| PERFORMANCE              |                                                                                                                                                                                                                                                                                 |
|--------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Concurrent Session       | 150,000                                                                                                                                                                                                                                                                         |
| New Sessions /Second     | 1,800                                                                                                                                                                                                                                                                           |
| OpenVPN                  | 15.90 Mbps                                                                                                                                                                                                                                                                      |
| WireGuard VPN Throughput | 82.62 Mbps                                                                                                                                                                                                                                                                      |
| SOFTWARE FEATURES        |                                                                                                                                                                                                                                                                                 |
| LAN DNS                  | Yes                                                                                                                                                                                                                                                                             |
| WAN Connection Type      | <ul style="list-style-type: none"> <li>• Static</li> <li>• Dynamic IP</li> <li>• PPPoE (supports MRU Configuration)</li> <li>• PPTP</li> <li>• L2TP</li> </ul>                                                                                                                  |
| MAC Clone                | Modify WAN/LAN MAC Address                                                                                                                                                                                                                                                      |
| DHCP                     | <ul style="list-style-type: none"> <li>• DHCP Server</li> <li>• DHCPv6 PD Server (only in Standalone Mode)</li> <li>• DHCP Options Customization</li> <li>• DHCP Address Reservation</li> <li>• Multi-IP Interfaces</li> <li>• Multi-Net DHCP</li> <li>• WAN DHCP 60</li> </ul> |
| Basic Function           | <ul style="list-style-type: none"> <li>• Stateful ACL</li> <li>• Quality of Service</li> <li>• Bridge VLAN</li> <li>• mDNS Repeater</li> </ul>                                                                                                                                  |
| IPv6                     | StaticIP/SLAAC/DHCPv6/PPPoE/6to4Tunnel/PassThrough/Non-Address mode                                                                                                                                                                                                             |
| VLAN                     | 802.1Q VLAN                                                                                                                                                                                                                                                                     |
| IPTV                     | IGMP v2/v3 Proxy, Custom Mode, Bridge Mode                                                                                                                                                                                                                                      |
| Advanced Routing         | <ul style="list-style-type: none"> <li>• Static Routing</li> <li>• Policy Routing</li> <li>• RIP</li> <li>• OSPF</li> </ul>                                                                                                                                                     |
| Bandwidth Control        | IP-based Bandwidth Control                                                                                                                                                                                                                                                      |
| Load Balance             | <ul style="list-style-type: none"> <li>• Intelligent Load Balance</li> <li>• Application Optimized Routing</li> <li>• Link Backup (Timing, Failover)</li> <li>• Online Detection</li> </ul>                                                                                     |

|                        |                                                                                                                                                                                                                                                            |
|------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>NAT</b>             | <ul style="list-style-type: none"> <li>• One-to-One NAT</li> <li>• Multi-Net NAT</li> <li>• Port Forwarding</li> <li>• Port Triggering</li> <li>• NAT-DMZ</li> <li>• FTP/H.323/SIP/IPSec/PPTP ALG</li> <li>• UPnP</li> <li>• Disable NAT</li> </ul>        |
| <b>Session Limit</b>   | IP-based Session Limit                                                                                                                                                                                                                                     |
| <b>OTHERS</b>          |                                                                                                                                                                                                                                                            |
| <b>Certification</b>   | CE, FCC                                                                                                                                                                                                                                                    |
| <b>Package Content</b> | <ul style="list-style-type: none"> <li>• ER605</li> <li>• Power Adapter</li> <li>• RJ-45 Ethernet Cable</li> <li>• Quick Installation Guide</li> </ul>                                                                                                     |
| <b>Environment</b>     | <ul style="list-style-type: none"> <li>• Operating Temperature: 0-40C (32-104F)</li> <li>• Storage Temperature: -40-70C (-40-158F)</li> <li>• Operating Humidity: 10-90% RH non-condensing</li> <li>• Storage Humidity: 5-90% RH non-condensing</li> </ul> |

[Download Datasheet](#)

\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

**URL :** <https://www.citraweb.com/produk/1621/>

**Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)**