CITRAWEB SOLUSI TEKNOLOGI
www.citraweb.com
info@citraweb.com
sales@citraweb.com

TP-LINK EAP603-Outdoor OMADA AX1800 Indoor/Outdoor Wi-Fi 6 Access Point

Kode : EAP603-Outdoor
Brand : TP-Link Omada
Jenis : Wireless Outdoor
Harga : Rp 1.653.000,00

TP-LINK EAP603-Outdoor OMADA merupakan perangkat access point **Dual Band Wi-Fi 6** 574Mbps (2.4 GHz) + 1201 Mbps (5 GHz) dilengkapi dengan 1 port Gigabit Ethernet support 802.3at PoE-in. Cocok digunakan pada Indoor/Outdoor.


Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.

***Spesifikasi perangkat dijual bisa berbeda dengan yang ditampilkan karena menyesuaikan dengan regulasi di Indonesia.**

Penawaran Harga Spesial
08112039555

- **Kecepatan Wi-Fi 6 1.8 Gbps tanpa gangguan :** 574 Mbps pada 2,4 GHz dan 1201 Mbps pada 5 GHz.
- **Didukung PoE+ :** Mendukung PoE 802.3at dan PoE Pasif (adaptor disertakan)
- **Ideal untuk Lingkungan Luar Ruangan:** Tahan cuaca IP65, perlindungan petir 6 kV, dan rentang suhu operasi yang andal dari -40 - +70 °C.
- **Pengaturan Mudah dan Cepat:** Pemasangan di dinding/tiang; Omada SDN untuk pengaturan sekali klik.
- **Fitur Unggulan:** Omada Mesh, Roaming Tanpa Gangguan, dan Manajemen Cloud Terpusat.

www.citraweb.com

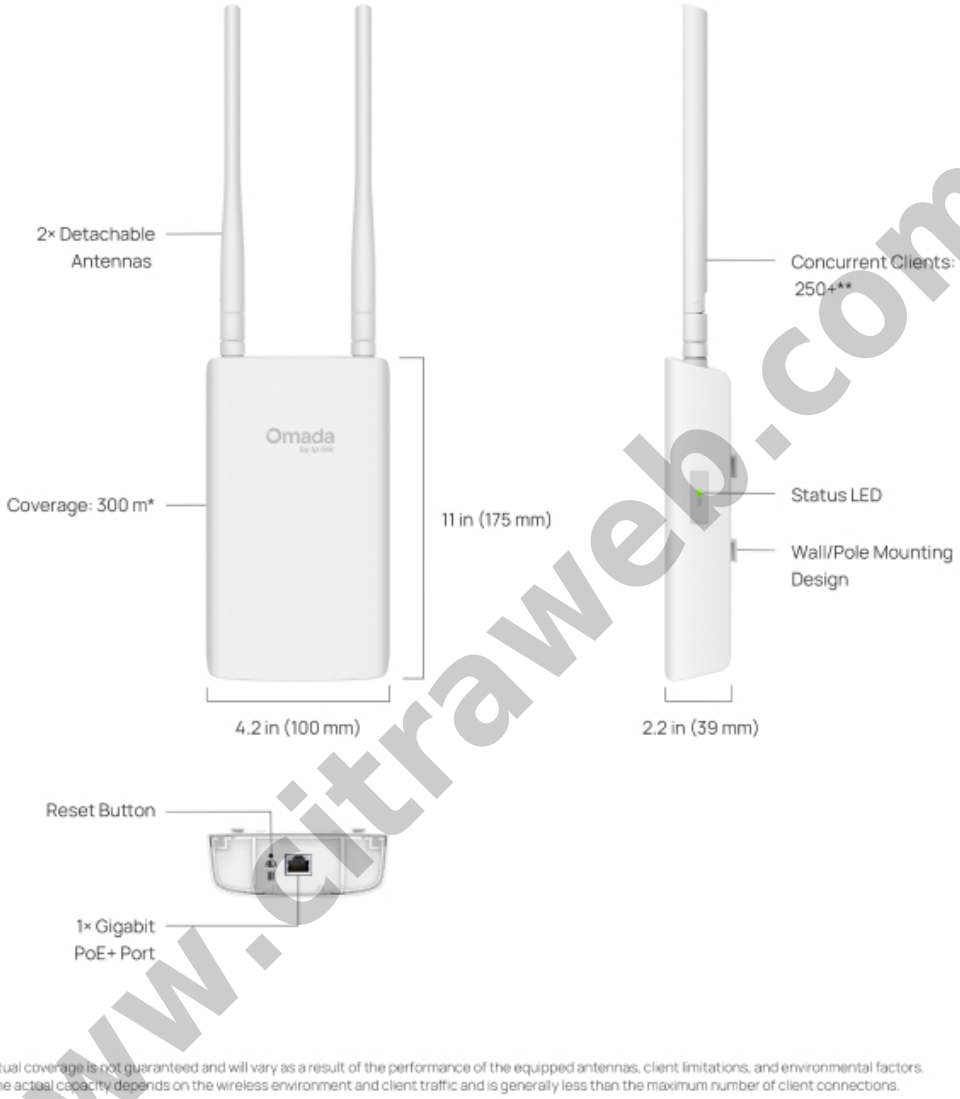

*Actual coverage is not guaranteed and will vary as a result of the performance of the equipped antennas, client limitations, and environmental factors.
**The actual capacity depends on the wireless environment and client traffic and is generally less than the maximum number of client connections.

www.citraweb.com

Spesifikasi

Model	EAP603-Outdoor
HARDWARE FEATURES	
Interface	• 1× 10M/100M/1000Mbps Gigabit Ethernet Port (RJ45); PoE in • 1× Grounding Terminal
Button	1× Reset button
Power Supply	Input: 802.3at PoE+: 42.5 - 57 V, 0.36A
Max. Power Consumption	15.8 W

CITRAWEB SOLUSI TEKNOLOGI
www.citraweb.com
info@citraweb.com
sales@citraweb.com

Dimensions (W x D x H)	230 × 207.5 × 69.7 mm (9.06 × 8.17 × 2.74 in)
Antenna	Wi-Fi • 2.4 GHz: 2 × 4 dBi (peak gain), external omnidirectional antennas • 5 GHz: 2 × 5 dBi (peak gain), external omnidirectional antennas IoT • Bluetooth: 1 × 4 dBi (peak gain), internal omnidirectional antennas
Weatherproof Enclosure	IP65
Mounting	Pole/Wall Mounting (Kits included)
WIRELESS FEATURES	
Coverage	• 2.4 GHz: up to 2,150 ft (200 m) • 5 GHz: up to 3,200 ft (300 m)
Wireless Standards	5 GHz: IEEE 802.11a/n/ac/ax 2.4 GHz: IEEE 802.11b/g/n/ax
Frequency	2.4 GHz, 5 GHz
Signal Rate	• 2.4 GHz: up to 573 Mbps • 5 GHz: up to 1201 Mbps *Note: Country-Specific Restriction Apply
Transmission Power	Maximum transmit power: CE (ERIP) • 2,4 GHz: 20 dBm • 5 GHz: 23 dBm di U-NII-1, 23 dBm di U-NII-2A, 29 dBm di U-NII-2C, FCC (Daya Konduksi) • 2,4 GHz: 25 dBm • 5 GHz: 27 dBm di U-NII-1, 24 dBm di U-NII-2A, 24 dBm di U-NII-2C, 27 dBm di U-NII-3 Minimum transmit power: CE (ERIP) • 2,4 GHz: 7 dBm • 5 GHz: 6 dBm di U-NII-1, 6 dBm di U-NII-2A, 6 dBm di U-NII-2C, 6 dBm di U-NII-3 FCC (Daya Terkonduksi) • 2,4 GHz: 4 dBm • 5 GHz: 4 dBm di U-NII-1, 4 dBm di U-NII-2A, 4 dBm di U-NII-2C, 4 dBm di U-NII-3 Peningkatan daya yang dapat disesuaikan: 1 dBm *Catatan: Daya gabungan MIMO, tidak termasuk penguatan antena. Daya pancar aktual bergantung pada hukum dan peraturan di Indonesia
Certification	CE, FCC

www.citraweb.com

Package Content	• EAP603-Outdoor • Passive PoE Adapter • Power Cord • Installation Guide • Mounting Kit • Waterproof Kit
Environment	• Operating Temperature: -30-70 C (-22-158 F) • Storage Temperature: -40-70 C (-40-158 F) • Operating Humidity: 10–90% RH non-condensing • Storage Humidity: 5–90% RH non-condensing

Download Datasheet

** Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat*

URL : https://www.citraweb.com/produk/1697/

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com

www.citraweb.com