

## OgmaConnect OC2000U (RoS Level 5)




**Kode** : OC2000U-L5  
**Kategori** : Discontinued  
**Harga** : Rp 15.840.000,00

This Ogma Connect OC2000U Appliance is presented in a 19" rack-mount form factor. One can deploy one of these appliances inside 1 U of Rack space. The Ogma Connect is powered by a state of the art Intel Multi Core Processor and the Intel 945G Chip-set.

### Spesifikasi

- **CPU** : Multi Core x86-64 64 Bit, Intel Core2Duo Processor
- **Memory** : 2 x 667MHz DDR2 Slots, 2 x 1024MB (2GB RAM) installed on the base Model
- **Boot loader** : Phoenix BIOS
- **Data storage** : 2x SATA, 2X IDE, 1x CF Slots with True IDE IBM MicroDrive Support
- **Ethernet** : 7 x 10/100/1000 Mbit/s Intel Pro 1000 Gigabit Ethernet ports supporting Auto-MDI/X through PCI-E single Lanes
- **PCI Slots** : 1x Mini PCI Slot, 1x Mini PCI 32 Bit Slot
- **Serial port** : 2x DB9 RS232C asynchronous serial ports
- **LEDs / LCDs** : 1x back lit 2character x16 character LCD Display, Power and HDD LED
- **Speaker** : Mini PC - Speaker
- **Power** : IEC C13 Power Cord, input power: 100VAC-250VAC 50Hz- 60Hz (International PSU)
- **Fan** : 3x Redundant CPU/Power Supply /Chassis Fans,
- **Dimensions** : 31cm x 45 cm x 4.4 cm
- **Temperature** : Operational: 0Â°C to 45Â°C
- **Humidity** : Operational: up to 95% relative humidity (non-condensing)
- **Power Supply** : 270W ATX PSU
- **Operating System** : MikroTik Router OS

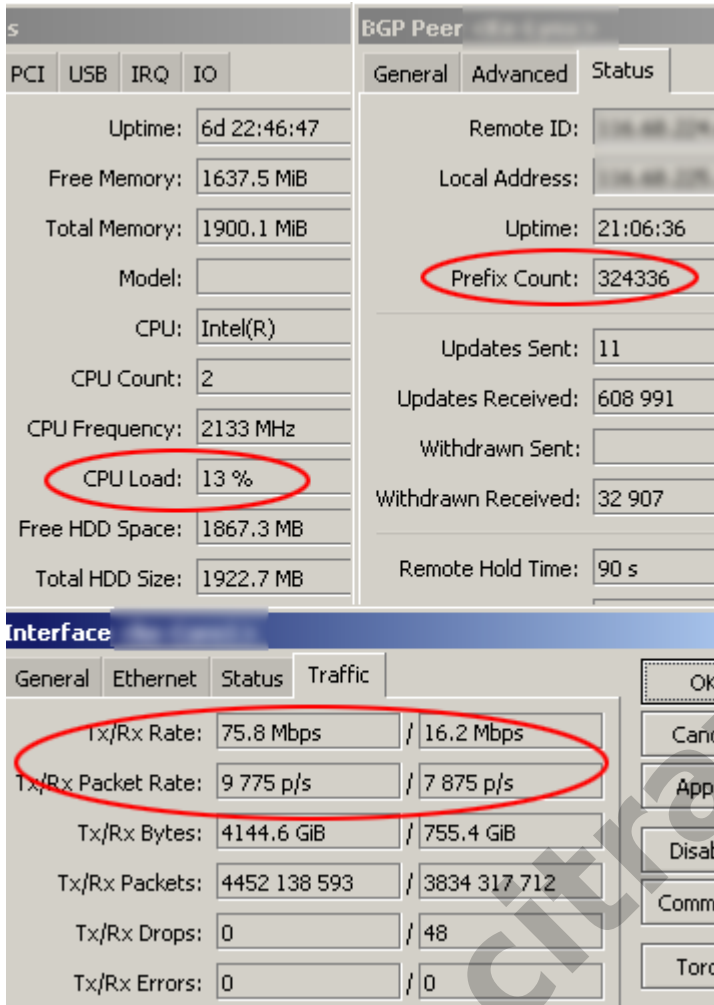

The screenshot displays two panels from Mikrotik WinBox. The top panel shows system information with 'CPU Load: 13%' circled in red. The 'BGP Peer' panel shows 'Prefix Count: 324336' circled in red. The bottom panel shows interface traffic statistics with 'Tx/Rx Rate: 75.8 Mbps / 16.2 Mbps' and 'Tx/Rx Packet Rate: 9 775 p/s / 7 875 p/s' circled in red.

System Information	BGP Peer Information
Uptime: 6d 22:46:47	Remote ID: [redacted]
Free Memory: 1637.5 MiB	Local Address: [redacted]
Total Memory: 1900.1 MiB	Uptime: 21:06:36
Model: [redacted]	<b>Prefix Count: 324336</b>
CPU: Intel(R)	Updates Sent: 11
CPU Count: 2	Updates Received: 608 991
CPU Frequency: 2133 MHz	Withdrawn Sent: [redacted]
<b>CPU Load: 13 %</b>	Withdrawn Received: 32 907
Free HDD Space: 1867.3 MB	Remote Hold Time: 90 s
Total HDD Size: 1922.7 MB	

Interface Traffic
<b>Tx/Rx Rate: 75.8 Mbps / 16.2 Mbps</b>
<b>Tx/Rx Packet Rate: 9 775 p/s / 7 875 p/s</b>
Tx/Rx Bytes: 4144.6 GiB / 755.4 GiB
Tx/Rx Packets: 4452 138 593 / 3834 317 712
Tx/Rx Drops: 0 / 48
Tx/Rx Errors: 0 / 0

Screen capture OC2000 di kondisi real, mampu melewati lebih dari 9 ribu pps dan menerima full route BGP (300K prefix) dengan CPU load 15%

**Test Type** | **Aggregate Result**

TCP Routed 2.288 Mb/sec

Contract On 188.406 Packet/sec

\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

**URL :** <https://www.citraweb.com/produk/225/>

**Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com**