

MikroBits Ainos 2071 (RoS Level 5)

Kode : MBITS2071-L5
Brand : Discontinued
Jenis : Discontinued
Harga : Rp 10.415.000,00



--Discontinued-- Router ini berbasis processor Intel Multi Core dengan 1U rackmount. Memiliki 7 buah port gigabit yang terkoneksi langsung ke mainboard, memberikan kecepatan tinggi pada tiap portnya. Sudah termasuk MikroTik RouterOS level 5.



Spesifikasi

- **CPU** : Multi Core x86-64 64 Bit, Intel Core2Duo E7500 2.93 GHz Processor
- **Memory** : 2 x 667MHz DDR2 Slots, 2 x 1024MB Industrial Grade RAM (2GB RAM) installed on the base Model
- **Boot loader** : Phoenix BIOS
- **Data storage** : 2x SATA, 1x CF Slots with True IDE IBM MicroDrive Support
- **Compact Flash** : 1 GB Industrial Grade Compact Flash for RouterOS
- **HDD** : 250GB SATA 2.5" HDD
- **Ethernet** : 7 x 10/100/1000 Mbit/s Intel Pro 1000 Gigabit Ethernet ports supporting Auto-MDI/X through PCI-E single Lanes
- **PCI Slots** : 1x PCI Slot, 1x Mini PCI 32 Bit Slot
- **Serial port** : 2x DB9 RS232C asynchronous serial ports
- **LEDs / LCDs** : 1x back lit 2character x16 character LCD Display, Power and HDD LED
- **Speaker** : Mini PC - Speaker
- **Power** : IEC C13 Power Cord, input power: 100VAC-250VAC 50Hz- 60Hz (International PSU)
- **Fan** : 3x Redundant CPU/Power Supply /Chassis Fans,
- **Dimensions** : 31cm x 45 cm x 4.4 cm
- **Temperature** : Operational: 0Â°C to 45Â°C
- **Humidity** : Operational: up to 95% relative humidity (non-condensing)
- **Power Supply** : 270W ATX PSU
- **Operating System** : MikroTik Router OS




admin@192.168.88.3 (MikroTik) – WinBox v5.0rc11 on x86 (x86_64)

Uptime: 05:07:55 Memory: 1876.5 MiB CPU: 54%

Interface List

| Interface | Ethernet | EoIP Tunnel | IP Tunnel | GRE Tunnel | VLAN | VRRP | Bonding |
|-----------|----------|-------------|------------|------------|-----------|-----------|---------|
| Name | Type | L2 MTU | Tx | Rx | Tx Pac... | Rx Pac... | |
| R ether1 | Ethernet | | 671.9 M... | 672.0 M... | 55 333 | 55 340 | |
| R ether2 | Ethernet | | 672.0 M... | 671.9 M... | 55 340 | 55 334 | |
| R ether3 | Ethernet | | 672.0 M... | 672.1 M... | 55 347 | 55 353 | |
| R ether4 | Ethernet | | 672.0 M... | 672.0 M... | 55 346 | 55 339 | |
| R ether5 | Ethernet | | 671.9 M... | 672.0 M... | 55 337 | 55 344 | |
| R ether6 | Ethernet | | 672.0 M... | 671.9 M... | 55 343 | 55 337 | |
| R ether7 | Ethernet | | 40.9 kbps | 4.8 kbps | 5 | 6 | |

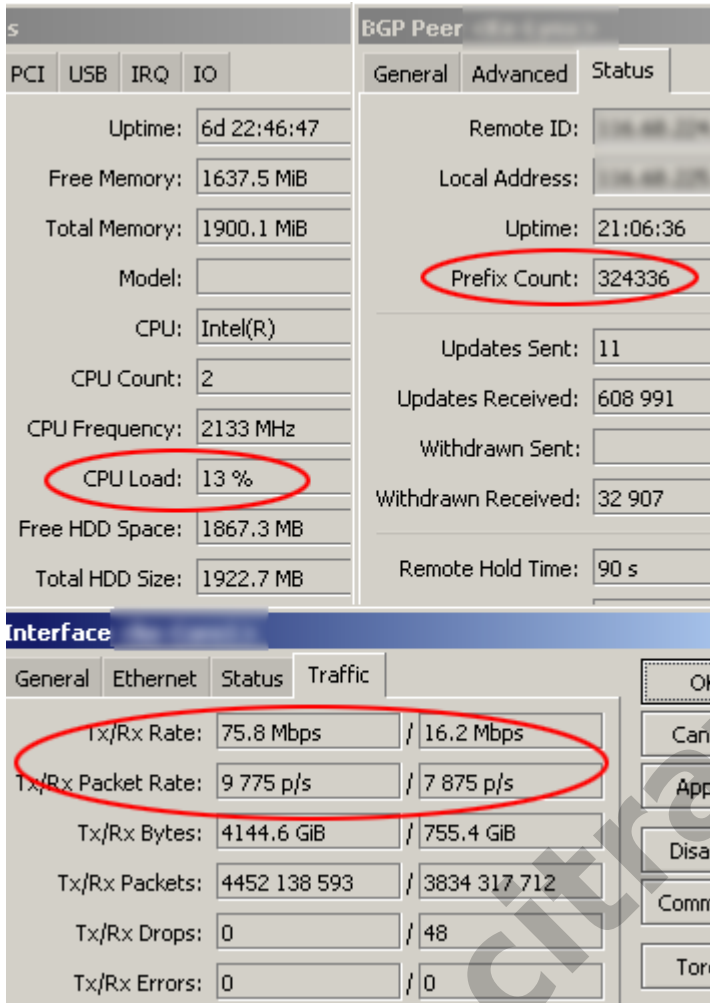

System

| | |
|-----------------|-------------|
| Uptime: | 6d 22:46:47 |
| Free Memory: | 1637.5 MiB |
| Total Memory: | 1900.1 MiB |
| Model: | |
| CPU: | Intel(R) |
| CPU Count: | 2 |
| CPU Frequency: | 2133 MHz |
| CPU Load: | 13 % |
| Free HDD Space: | 1867.3 MB |
| Total HDD Size: | 1922.7 MB |

BGP Peer

| | |
|---------------------|----------|
| Remote ID: | |
| Local Address: | |
| Uptime: | 21:06:36 |
| Prefix Count: | 324336 |
| Updates Sent: | 11 |
| Updates Received: | 608 991 |
| Withdrawn Sent: | |
| Withdrawn Received: | 32 907 |
| Remote Hold Time: | 90 s |


Interface

| | | | |
|--------------------|--------------|---|--------------|
| Tx/Rx Rate: | 75.8 Mbps | / | 16.2 Mbps |
| Tx/Rx Packet Rate: | 9 775 p/s | / | 7 875 p/s |
| Tx/Rx Bytes: | 4144.6 GiB | / | 755.4 GiB |
| Tx/Rx Packets: | 4452 138 593 | / | 3834 317 712 |
| Tx/Rx Drops: | 0 | / | 48 |
| Tx/Rx Errors: | 0 | / | 0 |

Screen capture pada kondisi real, mampu melewati lebih dari 9 ribu pps dan menerima full route BGP (300K prefix) dengan CPU load 15%

| Test type | Aggregate Result |
|-------------|-------------------|
| TCP Routed | 3.9 Gb/sec |
| Contract On | 1.000K Packet/sec |

Bypass Function - Aktif secara otomatis jika terjadi fail terhadap system (OS fail / Power fail).

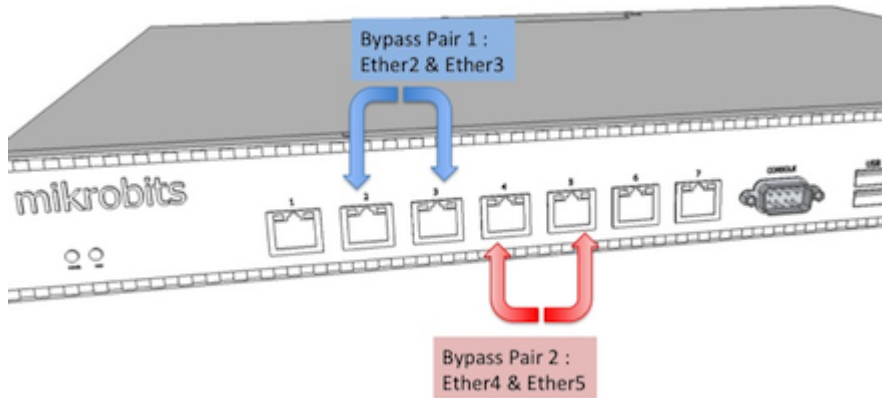

* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/249/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com

www.citraweb.com