

# On Line UPS PlusIII-1KLRB

**Kode** : PlusIII-1KLRB

**Brand** : Discontinued

**Jenis** : Discontinued

**Harga** : Rp 3.820.000,00



PlusIII-1KLRB adalah produk dari APlus UPS System dengan rating 1000VA/900Watt yang memiliki desain ganda (tower / rackmount) dan juga "Easy Battery Replacement". Dilengkapi dengan external PDU dan sekaligus MBS (Maintenance Bypass Switch) sehingga memungkinkan pengguna untuk mudah melakukan maintenance atau mengganti battery jika sudah lemah.

**\*Penjualan produk ini tidak termasuk battery**

## Features :

- High performance true double-conversion On Line UPS 1000VA
- Individual power distribution unit (PDU) maintenance bypass switch
- Intelligent Slot (SNMP card not included) + USB multiple communications
- External battery bank to extend back-up time (Optional)
- Microprocessor control guarantees high reliability
- Low heat dissipation in long time operation
- Emergency power-off function (EPO)
- Automatic self-testing function
- High efficiency mode (ECO mode)
- Output voltage regulation < 2%
- Power management software
- Output power factor 0.9
- Wide input range
- Fan speed control
- DC start


## Battery Type :

- VRLA 12V/9AH or VRLA 12V/7.2AH
- 3 pcs
- **Battery dimension 151 x 65 x 100 mm**

Backup Time (estimated) :

| LOAD     | 9AH Battery | 7.2AH Battery |
|----------|-------------|---------------|
| 900 Watt | 15 Minutes  | 12 Minutes    |
| 700 Watt | 19 Minutes  | 15 Minutes    |
| 500 Watt | 27 Minutes  | 21 Minutes    |

Easy Maintenance and Installation :

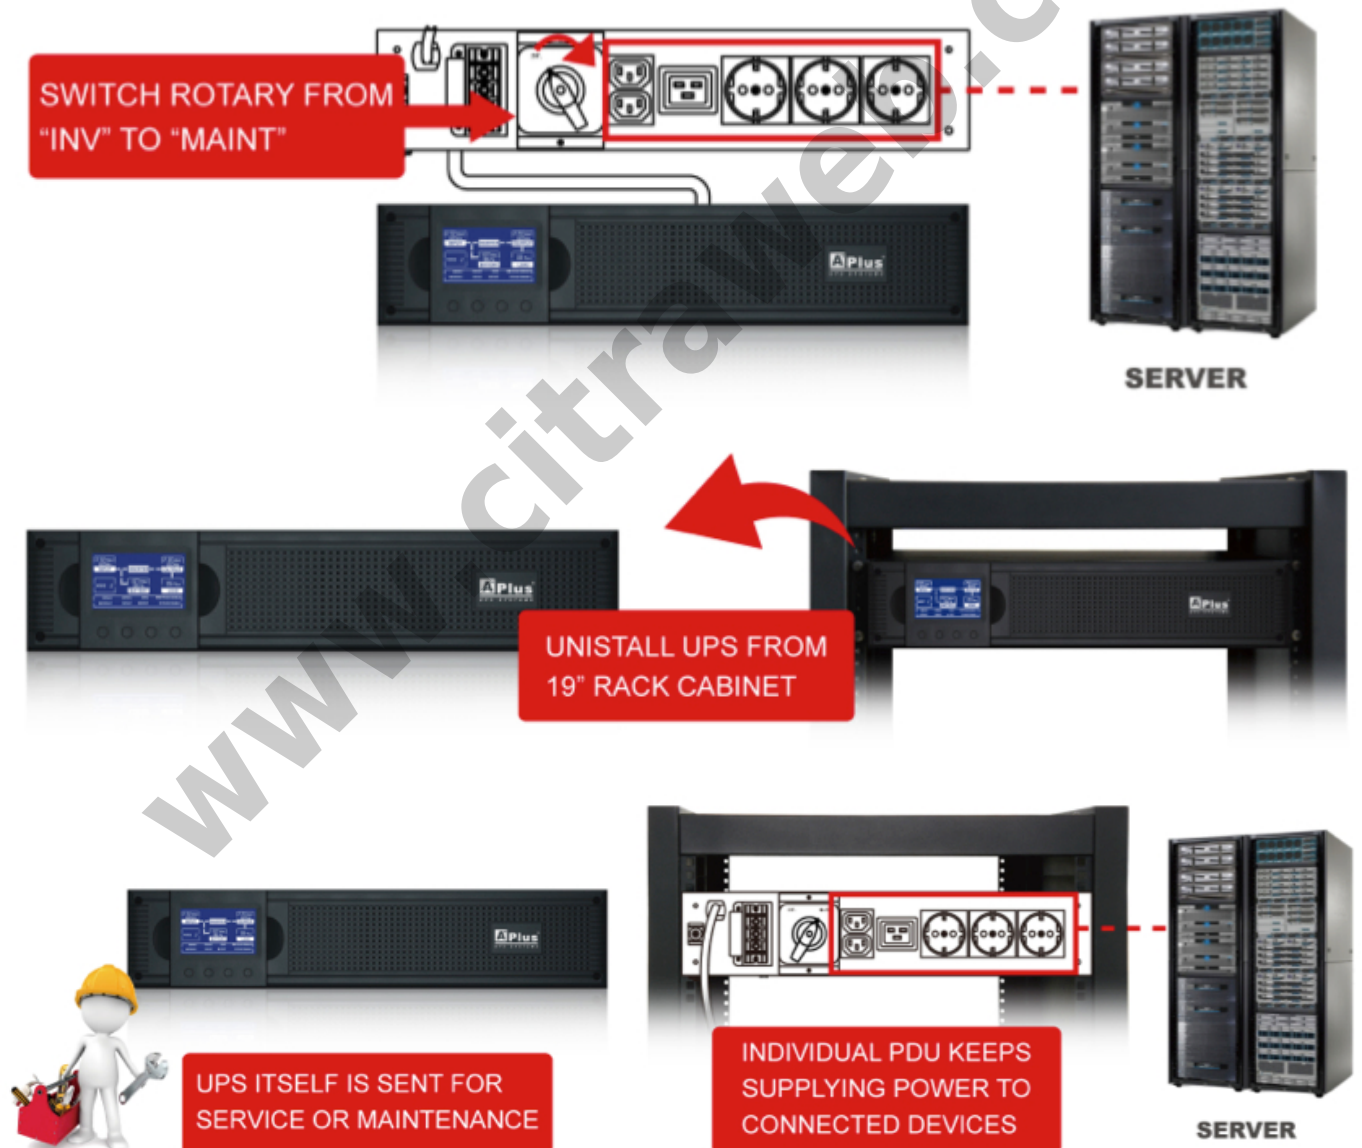

Manual :

[UPS-Aplus-PlusIII-HV.pdf](#)

Battery Installation Guide :

[Aplus\\_PlusIII-1KLRB\\_battery\\_Installation.pdf](#)

**Add-on Accessories :**

[Universal Rackmount L Rail](#)

Specification :

| <b>INPUT</b>             |  |
|--------------------------|--|
| Voltage                  | 1 Phase 2 Wires with Ground 220/230/240Vac |
| Voltage Range            | 110-300Vac                                 |
| Frequency                | 50Hz or 60Hz (Auto-Sensing)                |
| THDi                     | < 5% at full Load                          |
| <b>OUTPUT</b>            |  |
| Voltage                  | 220/230/240Vac                             |
| Voltage Range            | +/- 2%                                     |
| Frequency (Battery Mode) | 50Hz or 60Hz +/- 0.2Hz                     |
| Waveform                 | Pure Sinewave                              |
| THD                      | < 3%(linear load), < 5%(non-linear load)   |
| Crest Ratio              | 3:1  |
| <b>EFFICIENCY</b>        |  |
| To AC Mode               | > 88%                                      |
| To Battery Mode          | > 85%                                      |
| To ECO Mode              | > 93%                                      |
| <b>BATTERY</b>           |  |
| Voltage                  | 36VDC                                      |
| Type                     | 12V/7AH*3pcs                               |

|                              |   |
|------------------------------|---|
| Recharge Time                | 5 hours to 90%  |
| <b>TRANSFER TIME</b>         |   |
| Line Mode to Battery Mode    | 0ms   |
| Inverter to Bypass, ECO Mode | < 4ms   |
| ECO Mode to Inverter         | < 10ms  |
| <b>DISPLAY</b>               |   |
| LCD Display                  | Input, Output, Load, Battery, Mode/Fault/Warning code, Inverter operating, Bypass operating, Output voltage and frequency and Bypass disable / enable selection information |
| <b>AUDIBLE ALARM</b>         |   |
| Battery Mode                 | Beeps Every 4 Seconds   |
| Low Battery                  | Sounding Every Second   |
| Overload                     | Sounding Twice Every Second   |
| Fault                        | Beeping continuously  |
| <b>COMMUNICATIONS</b>        |   |
| Interface (Port)             | USB Port  |
| Intelligent Slot             | Slot for SNMP or AS400 card (Optional)  |
| EPO                          | Emergency Power Off   |
| <b>ENVIRONMENT</b>           |   |
| Operating Temperature        | 0° C - 45° C  |
| Humidity                     | 20-90% (Non-condensing)   |
| Acoustic Noise               | <50db at 1M   |
| <b>PHYSICAL</b>              |   |
| Rack Height                  | 2U  |
| Dimension (W*D*H)            | 480*440*90mm  |

*\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat*

**URL :** <https://www.citraweb.com/produk/811/>

**Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)**

[www.citraweb.com](http://www.citraweb.com)