

# TSW100 TELTONIKA Industrial Unmanaged PoE+ Switch



**Kode** : TSW100  
**Brand** : Teltonika  
**Jenis** : Switch Unmanaged POE  
**Harga** : Rp 1.385.000,00

TSW100 is an unmanaged Gigabit Ethernet switch supporting Power-over-Ethernet. Classified as power source equipment (PSE), it centralizes the power supply, providing up to 30 watts per port and reducing installation effort. Five Gigabit Ethernet ports provide an economical high-bandwidth solution for a secure industrial Ethernet network.


**Produk ini belum termasuk power adaptor**

Penawaran Harga Spesial

08112039555

## Features :

- 4 x PoE+ ports with 802.3af and 802.3at support
- Total power budget at PSE up to 120 W
- 5 x Gigabit Ethernet with speeds up to 1000 Mbps
- DIN rail and surface mounting options

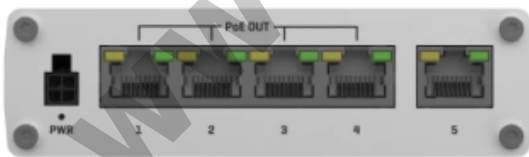

## Specification

<b>Model</b>	TSW100
<b>ETHERNET</b>	

<b>LAN</b>	5 x ETH ports, 10/100/1000 Mbps, supports auto MDI/MDIX crossover
<b>IEEE 802.3 series standards</b>	802.3i, 802.3u, 802.3ab, 802.3x, 802.3az, 802.3ad
<b>POE</b>	
<b>PoE ports</b>	Port 1- 4
<b>PoE standards</b>	802.3af and 802.3at
<b>PoE Max Power per Port (at PSE)</b>	30 W
<b>PoE Power Budget (at PSE)</b>	120 W
<b>PERFORMANCE SPECIFICATIONS</b>	
<b>Bandwidth (Non-blocking)</b>	10 Gbps
<b>Packer buffer</b>	128 KB
<b>MAC address table size</b>	2K entries
<b>POWER</b>	
<b>Connector</b>	4-pin industrial DC power socket
<b>Input voltage range</b>	7 - 57 VDC
<b>Input voltage range for PoE</b>	44 - 57 VDC
<b>Power consumption</b>	Idle: 2 W / Max (no PoE): 9 W / PoE Max: 129 W
<b>PHYSICAL INTERFACES</b>	
<b>Ethernet</b>	5 x RJ45 ports, 10/100/1000 Mbps
<b>Status LEDs</b>	1 x Power LED, 10 x LAN status LEDs
<b>Power</b>	1 x 4-pin power connector
<b>Other</b>	1 x Grounding screw
<b>PHYSICAL SPECIFICATION</b>	
<b>Casing material</b>	Full aluminum housing
<b>Dimensions (W x H x D)</b>	115 x 32 x 95 mm
<b>Mounting options</b>	DIN rail or wall mounting (additional kit needed), flat surface placement

OPERATING ENVIRONMENT	
Operating temperature	-40 °C to 75 °C
Operating humidity	10% to 90% non-condensing
Ingress Protection Rating	IP30

Standard Package Contains :

- TSW100
- 62 W PSU
- QSG (Quick Start Guide)
- Packaging box

[Download Datasheet](#)

\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1062/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)