

On Line UPS PlusPRO 1 3000VA/2700Watt

**Kode** : PLUSPRO1-3000G(B)**Brand** : Aplus**Jenis** : UPS**Harga** : Rp 5.400.000,00

PlusPro 1-3000G adalah produk dari APlus UPS System dengan rating 3000VA/2700Watt yang memiliki desain tower dan juga fitur "Easy Battery Extender". Dilengkapi dengan external battery connector (Anderson connector) sehingga memungkinkan pengguna untuk mudah melakukan penambahan battery jika menginginkan backup time lebih lama.

***Penjualan produk ini termasuk battery**

***Pengiriman hanya jalur darat dan area pulau jawa**

***Garansi 1 Tahun**

***Garansi battery 1 bulan**


Penawaran Harga Spesial

 **08112039555**

Features :

- High-performance true double-conversion On-Line UPS 2000VA
- External battery connector (Anderson Connector) to extend the backup time
- Microprocessor control guarantees high reliability
- Low heat dissipation in long-time operation
- RS-232 port multiple communications
- Automatic self-testing function
- High-efficiency mode (ECO mode)
- Output voltage regulation +/- 2%
- Power management software
- Output power factor 0.9
- Wide input range
- Fan speed control
- DC start



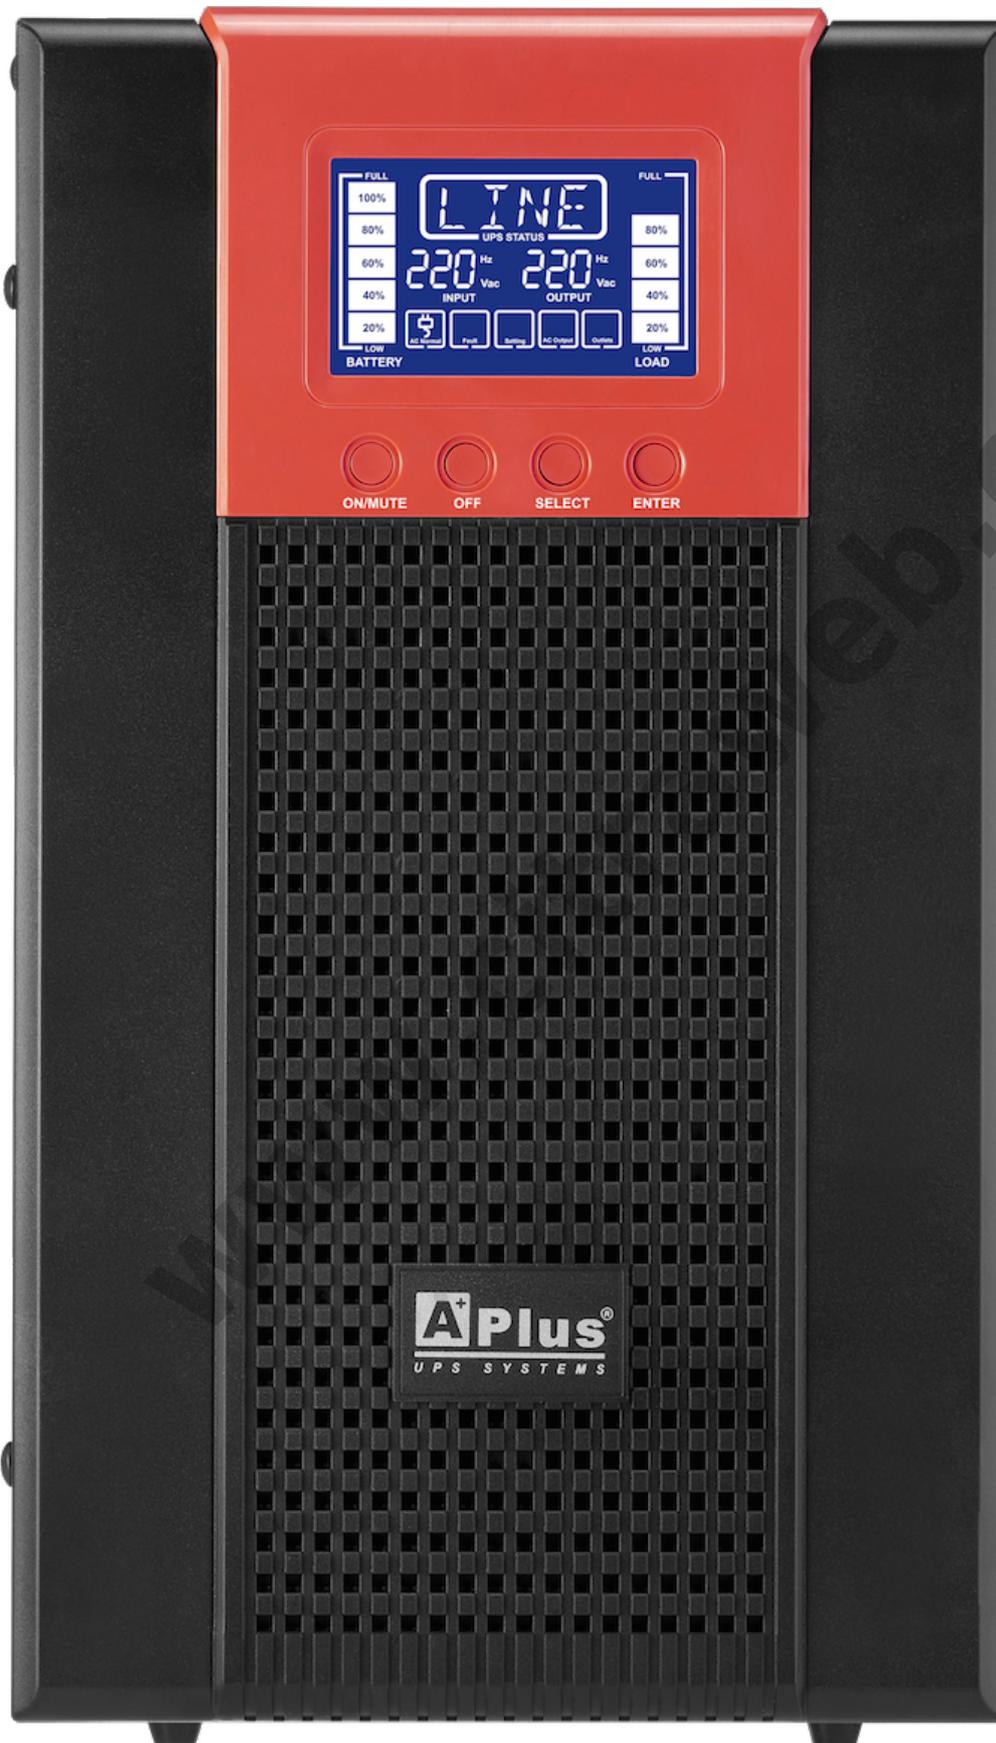



Battery Type :

- VRLA 12V/9AH
- 6 pcs (VRLA 12V/9AH included)
- **Battery dimension 151 x 65 x 100 mm**

Specification :

Model	PLUSPRO1-3000G(B)
Capacity	3KVA/2.7KW
Input	
Voltage	1 Phase 2 Wires with Ground 220/230/240Vac
Voltage Range	100Vac-300Vac
Frequency	50Hz or 60Hz (Auto-sensing)
Current Distortion(THDi)	<5% at full load
Output	
Voltage	220/230/240Vac
Voltage Regulation	+/-2%
Frequency (battery mode)	50/60Hz \pm 0.05Hz
Current Crest Ratio	3:1
Voltage Distortion (THDv)	< 1% (linear load), <5% (non-linear load)
Output Waveform	Pure Sinewave
Efficiency	
Inverter Mode	>90%
ECO Mode	>97%

Battery	
Voltage	72VDC
Capacity & Number	12V/9AH *6pcs
Recharge Time	4 hours to 90%
Transfer Time	
Battery Mode to Inverter Mode	0ms
Inverter to Bypass	<4ms
Display	
LCD Display	Input, Output, Load, Battery, Mode/Fault/Warning code, Inverter operating, Bypass operating, Output voltage and frequency and Bypass disable/enable selection information
Communications	
Interface Port	RS-232 port
Environment	
Ambient Temperature	0°C - 40°C
Humidity	<95% (Non-condensing)
Acousitc Noise	<50dB at 1M
Physical	
Dimension (D*W*H)	405*195*330mm

External Battery Installation :



- 48VDC Battery (Recommendation VRLA type Battery)

Manual :

[PLUSPRO1-Manual](#)

* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1305/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com