

AC Long-Range UNIFI UBIQUITI Dual Band WiFi 5 Access Point



Kode : UAP-AC-LR

Brand : Ubiquiti


Jenis : Wireless Indoor


Harga : Rp 1.470.000,00

Ideal for long range deployments, the UniFi AC LR AP offers simultaneous, dual-band operation with 3x3 MIMO in the 2.4 GHz band and 2x2 MIMO in the 5 GHz band. The innovative antenna design provides a longrange, symmetrical link coverage area, and the antenna gain of the UniFi AC LR AP performs better than one way high transmit power does for connecting distant clients.

Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.

Penawaran Harga Spesial

 08112039555

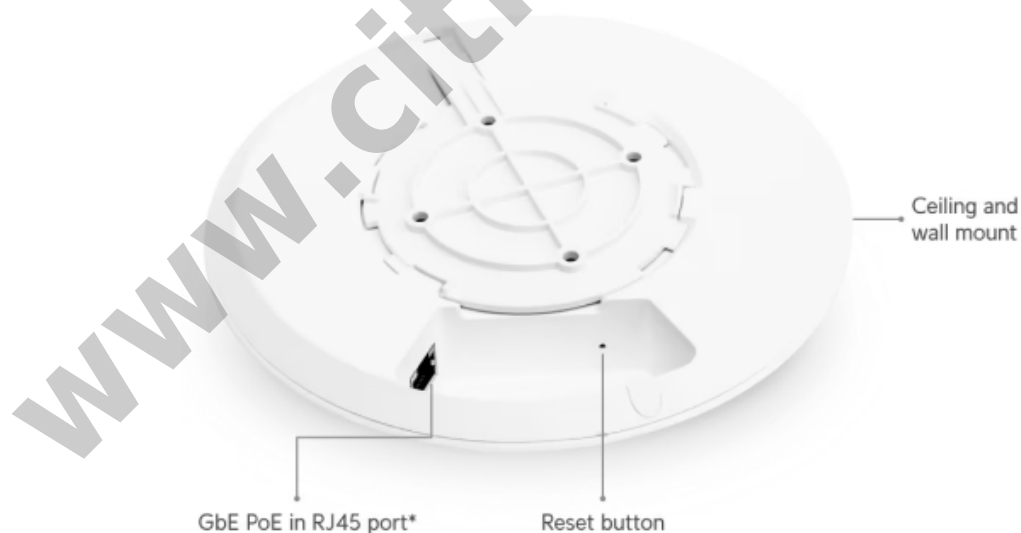

*24V DC, 0.5A GbE PoE adapter included with single unit purchases.

Specification

Model	UAP-AC-LR
WiFi Standard	WiFi 5
Spatial Streams	5
Coverage Area	185 m ² (2,000 ft ²)
Max. Client Count	250+
Mounting	Ceiling, Wall (Lite Mount Included)
Power Method	PoE
MIMO	5 GHz : 2 x 2 (DL MU-MIMO) 2.4 GHz : 3 x 3 (DL MU-MIMO)
Max. Data Rate	5 GHz : 867 Mbps (BW80) 2.4 GHz : 450 Mbps (BW40)
Antenna Gain	5 GHz : 3 dBi 2.4 GHz : 3 dBi
Max. TX Power	5 GHz : 22 dBm 2.4 GHz : 24 dBm
Max. BSSIDs	8 per Radio
Supported Data Rates	802.11ac (WiFi 5) : 6.5 Mbps to 867 Mbps (MCS0 - MCS9 NSS1/2, VHT 20/40/80) 802.11n : 6.5 Mbps to 450 Mbps (MCS0 - MCS23, HT 20/40)
Dimensions (W x D x H)	175.7 x 43.2 mm
Max. Power Consumption	6.5W
Includes PoE Adapter	Yes
Networking Interface	(1) GbE RJ45 port
Management	Ethernet
Channel Bandwidth	HT 20/40, VHT 20/40/80 (MHz)
Certifications	CE, FCC, IC
Operating Frequency	Worldwide: 2400 - 2483.5 MHz 5150 - 5725 MHz
Ambient Operating Temperature	-10 to 70 C (14 to 158 F)
Ambient Operating Humidity	5 to 95% noncondensing

[Download Datasheet](#)

* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1322/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com

www.citraweb.com