

TP-LINK ER706W OMADA Gigabit AX3000 Wi-Fi 6 VPN Gateway

**Kode** : ER706W**Brand** : TP-Link Omada**Jenis** : Router Wireless**Harga** : Rp 2.107.000,00


TP-LINK ER706W OMADA merupakan perangkat gateway AX3000 Dual-Band Wi-Fi 6 (2402 Mbps pada 5GHz dan 574 Mbps pada 2.4GHz) dilengkapi dengan 5 port gigabit (WAN/LAN), 1 port SFP 1G (WAN/LAN) dan 1 port USB 3.0. Support load balancing hingga 5 WAN.

Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.

***Spesifikasi perangkat dijual bisa berbeda dengan yang ditampilkan karena menyesuaikan dengan regulasi di Indonesia.**

Penawaran Harga Spesial **08112039555**

- AX3000 Wi-Fi 6 dengan kecepatan 2402 Mbps pada frekuensi 5 GHz dan 574 Mbps pada frekuensi 2,4 GHz
- 1 slot SFP Gigabit dan 5 port RJ45 Gigabit
- 1x port USB 3.0 (Mendukung penyimpanan USB, dan pencadangan LTE dengan dongle LTE)
- Penyeimbangan beban hingga 5 port WAN meningkatkan tingkat pemanfaatan broadband multi-jalur
- Jaringan mesh dengan titik akses Omada untuk memperluas WiFi tanpa kabel dan switch tambahan
- Manajemen cloud terpusat melalui web atau aplikasi Omada
- Keamanan tinggi SSL/IPSec/GRE/WireGuard/PPTP/VPN L2TP/OpenVPN
- Pertahanan DoS/DDoS, pemfilteran IP/MAC/URL, DPI, dan IPS/IDS untuk keamanan yang lebih baik.

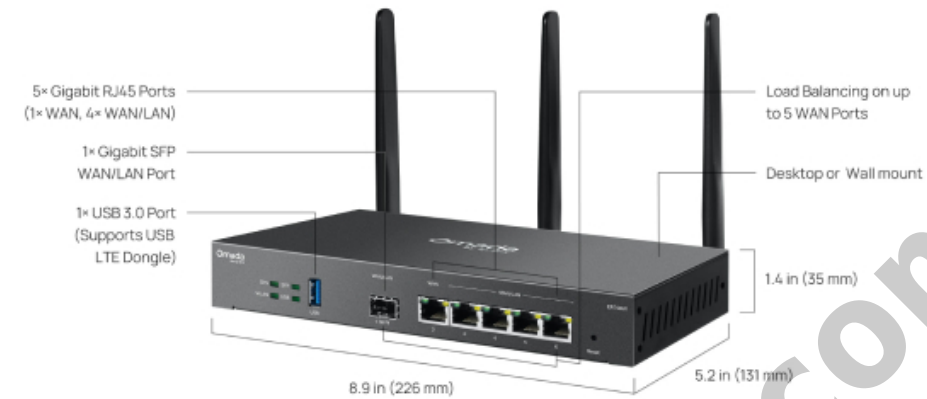


*GRE VPN is supported only in Standalone Mode.




Seamless Mesh Wi-Fi – Extend Wi-Fi without Extra Cabling and Switch**

Besides, thanks to seamless roaming, enjoy uninterrupted streaming when moving between gateway and APs.⁸

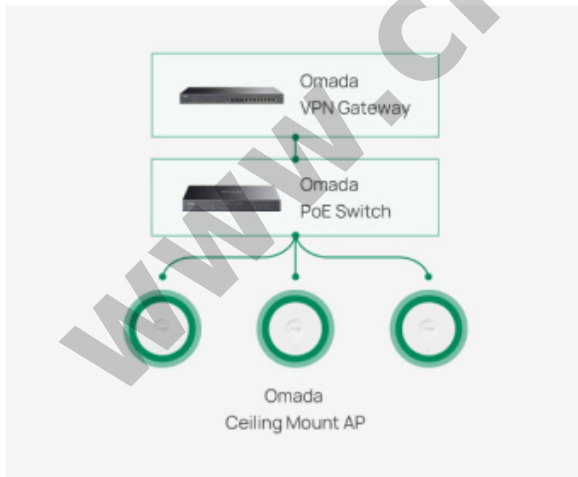

Traditional Wired Networking

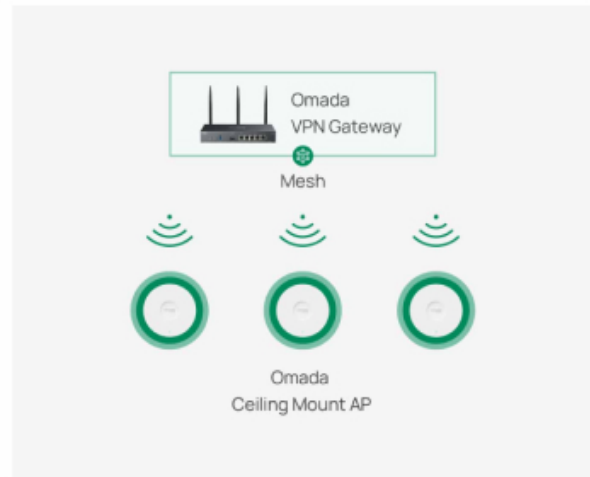

Mesh Wireless Networking

Spesifikasi

Model	ER706W

HARDWARE FEATURES	
Interface	• 1 Gigabit SFP WAN/LAN Port • 1 Gigabit WAN Port • 4 Gigabit LAN/WAN Ports • 1 USB3.0 (supports USB LTE dongle and USB Storage)
Button	Reset Button
Power Supply	12VDC / 2A Power Adapter
Wi-Fi Frequency & Signal Rate	• 2.4 GHz: 574 Mbps • 5 GHz: 2402 Mbps (HE160)
Flash	128 MB NAND
DRAM	512 MB DDR4
LED	SYS, WLAN, SFP, USB, WAN (1000M Link/Act, 100/10M Link/Act), WAN/LAN (1000M Link/Act, 100/10M Link/Act)
Dimensions (W x D x H)	8.9 x 5.2 x 1.4 in (226 x 131 x 35 mm) (Antenna dimensions are not included)
Mounting	Desktop/Wall-mount
Max. Power Consumption	22.7W (with USB 3.0 connected) 18.2W (without USB 3.0 connected)
PERFORMANCE	
Concurrent Session	150,000
New Sessions /Second	5,100
OpenVPN	129.3Mbps
WireGuard VPN Throughput	393.5Mbps
SOFTWARE FEATURES	
Wireless Advanced Features	• Enable/Disable Wireless Radio & SSID Broadcast • Automatic Channel Selection Algorithm • Transmit Power Control (Adjust transmit Power on dBm) • Seamless Roaming • Mesh (with EAP that supports Mesh) • OFDMA • Beamforming • MU-MIMO • Wireless Encryption: WPA/WPA2/WPA3 Personal, WPA/WPA2/WPA3 Enterprise
WAN Connection Type	• Static IP • Dynamic IP • PPPoE (supports MRU Configuration) • PPTP • L2TP

MAC Clone	Modify WAN Address
DHCP	• DHCP Server • DHCPv6 PD Server (only in Standalone Mode) • DHCP Options Customization • DHCP Address Reservation • Multi-IP Interfaces • Multi-Net DHCP • WAN DHCP 60
Basic Function	• Stateful ACL • Quality of Service • Bridge VLAN • mDNS Repeater
IPv6	StaticIP / SLAAC / DHCPv6 / PPPoE / 6to4Tunnel / PassThrough / Non-Address mode
VLAN	802.1Q VLAN
IPTV	IGMP v2/v3 Proxy, Custom Mode, Bridge Mode
Advanced Routing	• Static Routing • Policy Routing • RIP • OSPF
Bandwidth Control	IP-based Bandwidth Control
Load Balance	• Intelligent Load Balance • Application Optimized Routing • Link Backup (Timing, Failover) • Online Detection
NAT	One-to-One NAT Multi-Net NAT Virtual Server Port Triggering NAT-DMZ FTP/H.323/SIP/IPSec/PPTP ALG UPnP Disable NAT
Session Limit	IP-based Session Limit
OTHERS	
Certification	CE, FCC
Package Content	• ER706W • Power Adapter • Quick Installation Guide

Environment

- Operating Temperature: 0-40C (32-104F)
- Storage Temperature: -40-70C (-40-158F)
- Operating Humidity: 10-90% RH non-condensing
- Storage Humidity: 5-90% RH non-condensing

[Download Datasheet](#)

* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1623/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com